

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner set from 1884 survey by Herman D. Gradon under contract with the General Land Office

Set a 4" x 4" post, marked 1/4 on two sides from which a:

24" Fir bears N 65° W 9 lks

10" Fir bears S 60° W 8 lks

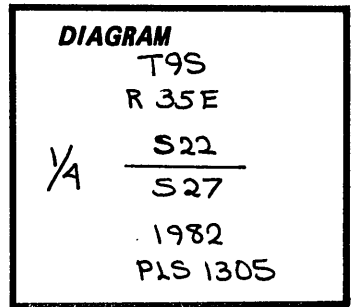

Description of corner evidence found:

Original 4" x 4" post with visible scribing on two sides

Fd. orig. BTs: 31" D. Fir bears N 65° W 5.9 ft.

14" D. Fir bears S 60° W 5.3 ft.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2 1/2" brass cap in a 2 1/2" x 30" G.I. pipe 4" above ground with flared base and rock mound. Corner is marked as per diagram above.

Scribed BTs: 11" W. Fir bears N 28° E 20.3 ft., scribed 1/4 S22 BT

I hereby certify the above corner monument was re-established as herein described on August 15, 1982

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James W. Prochnau
OREGON
SEPTEMBER 23, 1977
JAMES W. PROCHNAU
1305

Witnesses: David Dean
Richard Carter

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *25* day of *Jan*, 19*83*
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)