
TOWNSHIP 19 SOUTH, RANGE 32 EAST, OF THE WILLAMETTE MERIDIAN, OREGON

DEPENDENT RESURVEY

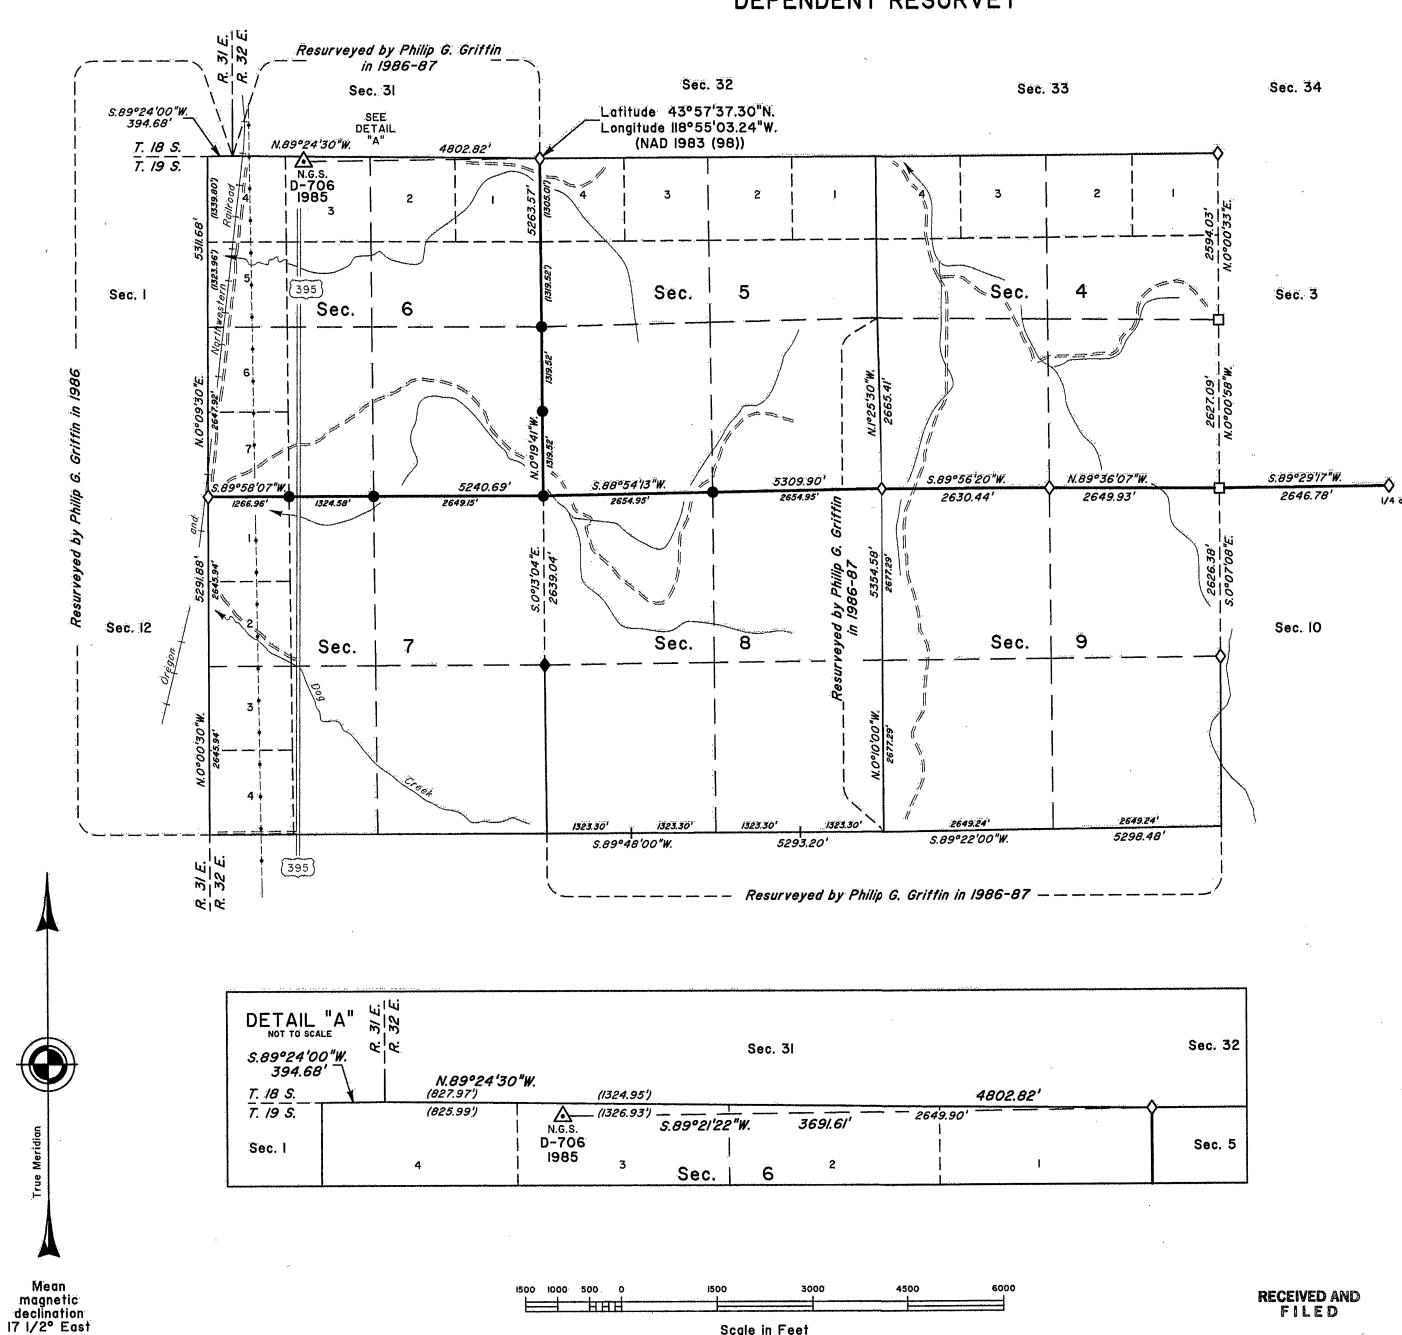

Scale in Feet

A history of surveys is contained in the field

This plat represents a dependent resurvey of a portion of the subdivisional lines, T. 19 S., R. 32 E., Willamette Meridian, Oregon, designed to restore the corners in their true original locations according to the best available evidence.

Measured distances and directions have been adjusted by Cadastral Measurement Management for Windows (WinCMM), computer software that incorporates a least squares adjustment routine. The adjusted bearings and distances are reported to the nearest second and O.OI foot.

The lottings and areas are as shown on the platapproved December 3, 1883.

The survey was executed by Bryan S. Selbold, Cadastral Surveyor, beginning July 10, 2001, and completed July 24, 2001, pursuant to Special Instructions dated April 16, 2001, under Group Number 1982, Oregon.

Timber in this area consists of pine, juniper, and mountain mahogany.

The tie to the geodetic control station is reported as mean bearing and sea level distance.

LEGEND

- Original corner previously remonumented
- ◆ Original corner remonumented this survey
- Corner previously established or reestablished ● Corner established or reestablished this survey

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Portland, Oregon

October 17, 2003

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Mary J. M. Hartil

Chief Cadastral Surveyor of Oregon

D.C.W.