


A PARTITION OF PARCEL 1, OF THE RE-PLAT OF PARTITION NO. 97-19
SITUATED IN THE SE1/4 AND IN THE SW1/4 OF SECTION 29
T13S, R31E, W.M.
GRANT COUNTY, OREGON

Sheet 1 of 2

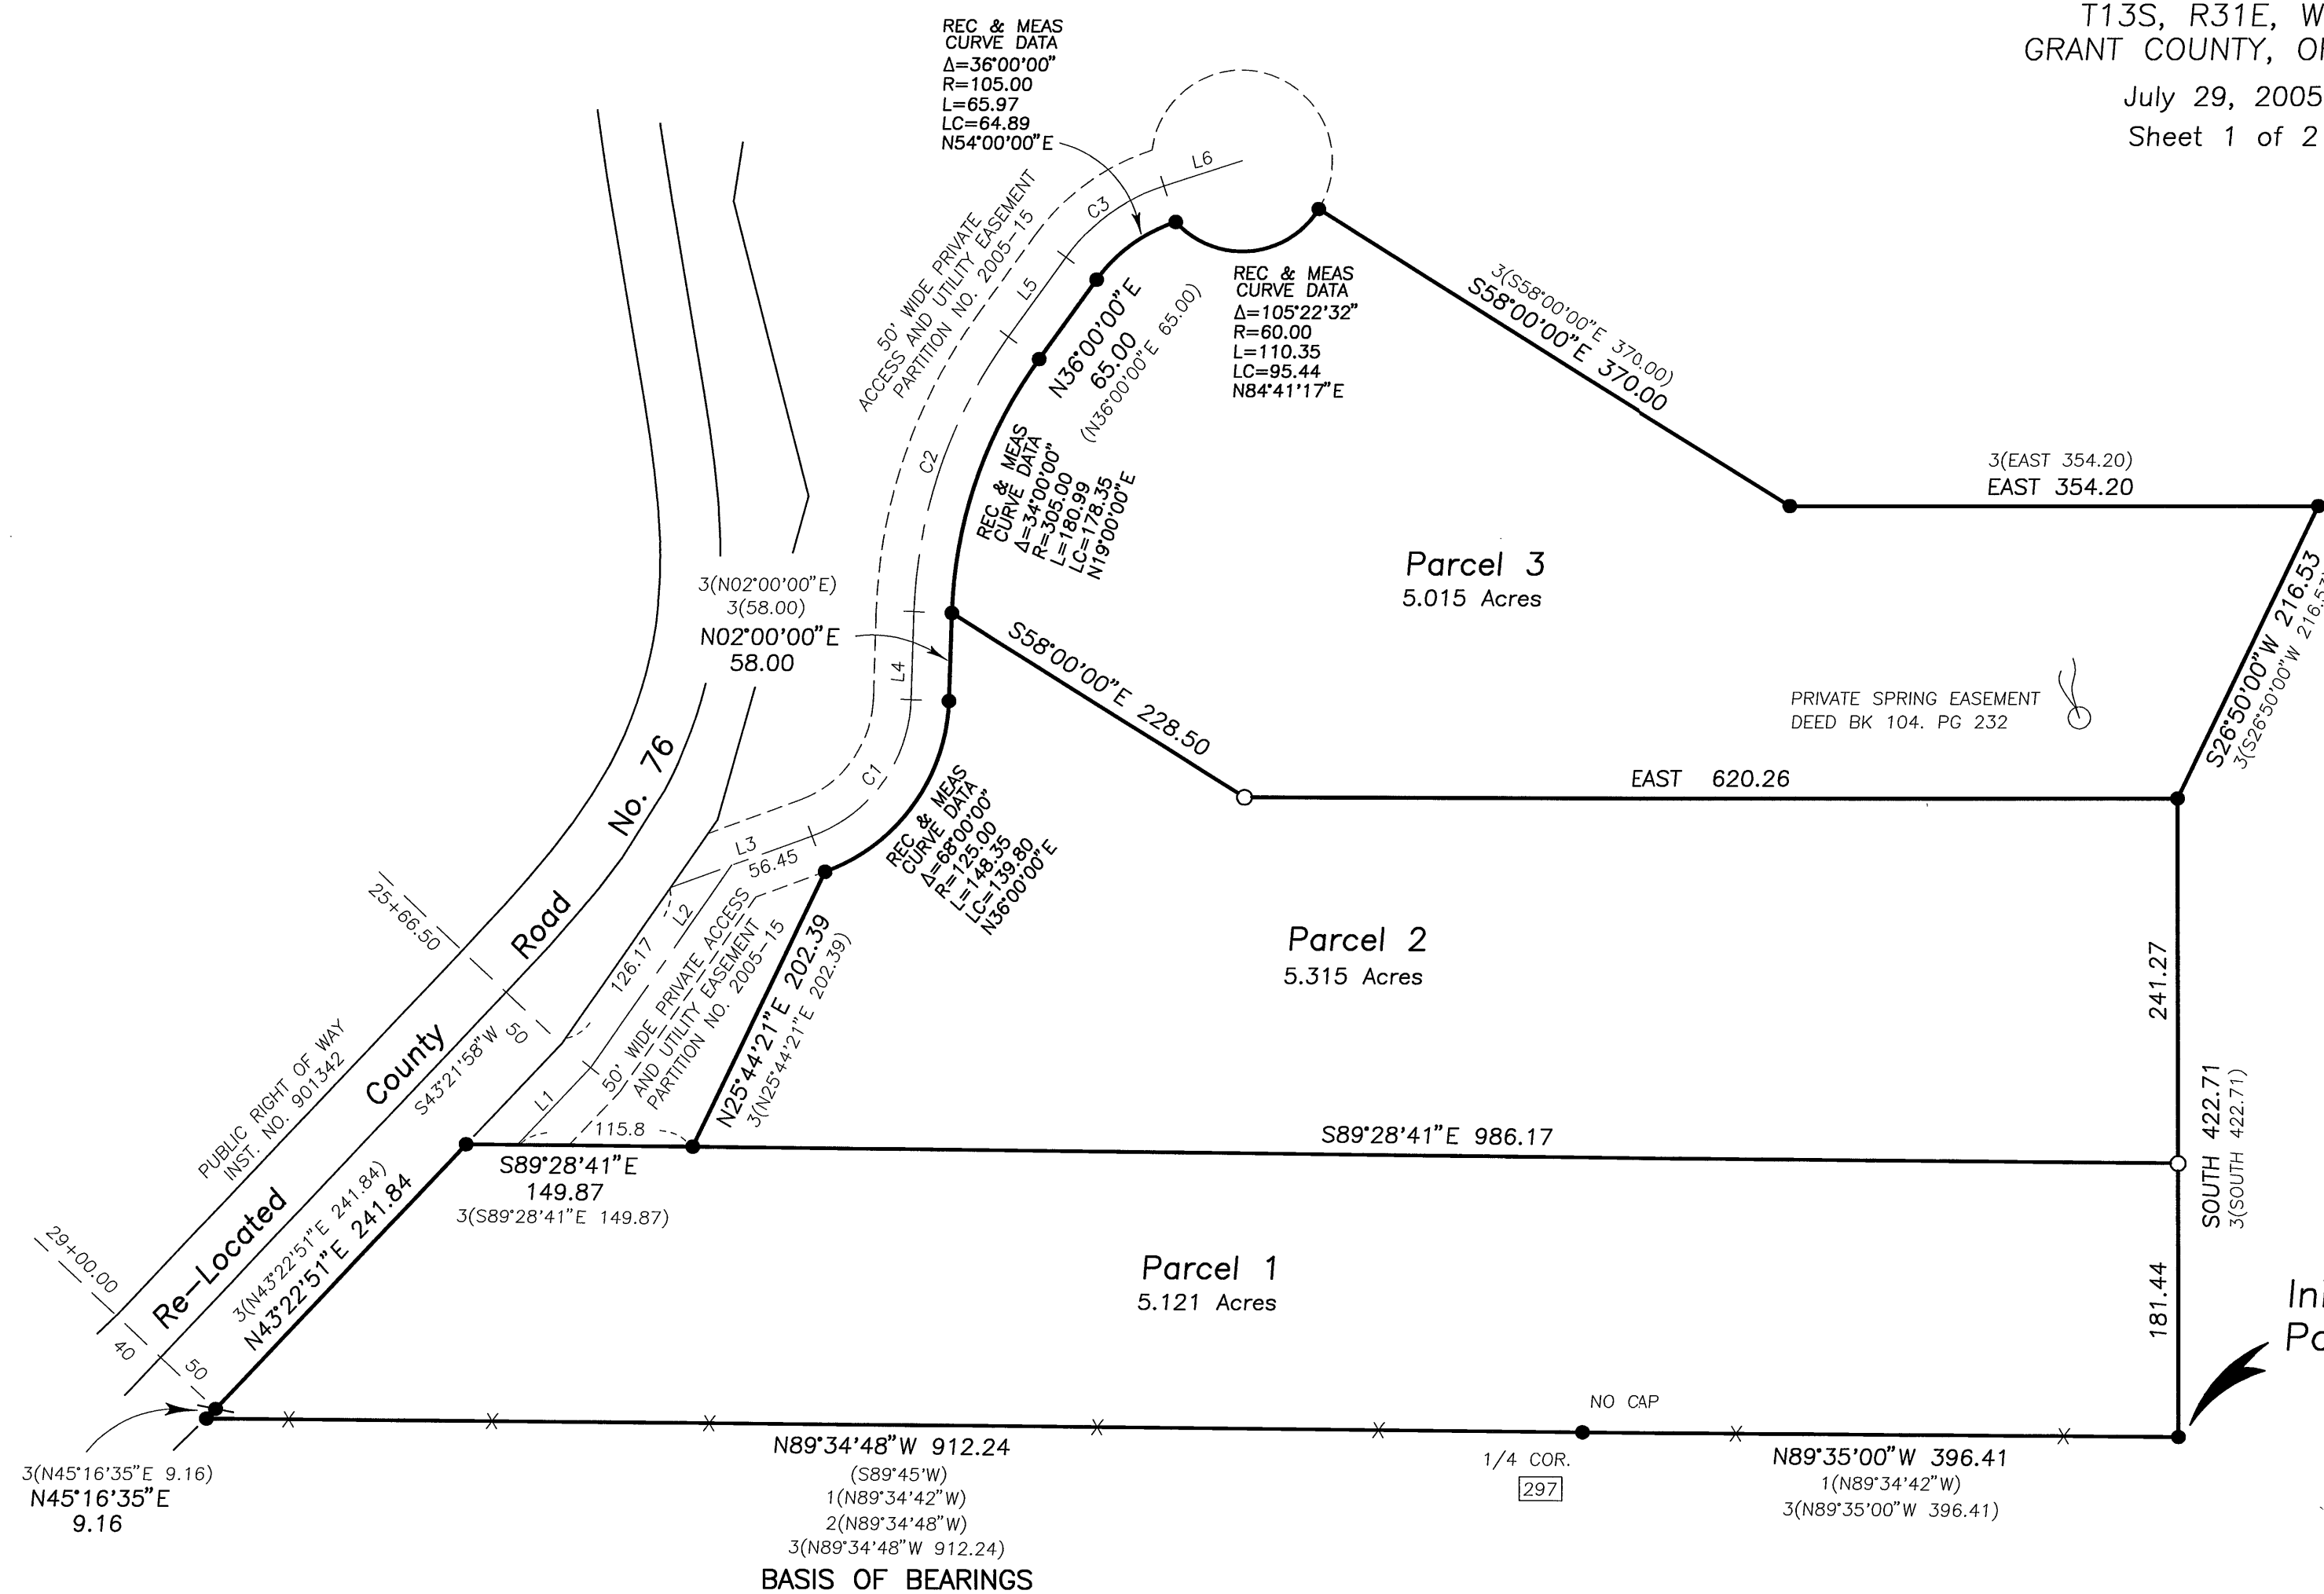

Scale 1"=100'

BASIS OF BEARINGS


Re-Plat of Partition No. 97-19

Access and Utility Easement

		COURSE	BEARING	DISTANCE		
		L1	N43°22'51"E	70.54		
		L2	N34°54'13"E	163.60		
		L3	N70°00'00"E	99.93		
		L4	N02°00'00"E	58.00		
		L5	N36°00'00"E	65.00		
		L6	N72°00'00"E	54.54		
CURVE	RADIUS	LENGTH	DELTA	CHORD	CH.BEARING	
C1	100.00	118.68	68°00'00"	111.84	N36°00'00"E	
C2	330.00	195.83	34°00'00"	192.97	N19°00'00"E	
C3	130.00	81.68	36°00'00"	80.34	N54°00'00"E	

LEGEND

- Found 5/8" iron pin with alum. cap. See Survey No. 1160.
 - Found 5/8" iron pin with attached red plastic cap, see Re-Plat of Partition No. 97-19.
 - Set 5/8"x30" iron pin with attached red plastic cap marked CORNERSTONE SURVEYING, INC.
- X—X Fence Line
- () GLO record bearing and distance.
- 1() Survey No. 297 record bearing and distance.
- 2() LP No. 2003-8 record bearing and distance.
- 3() Re-Plat of LP 97-19 record bearing and distance.
-  Found monument, see record map of survey number shown in box.

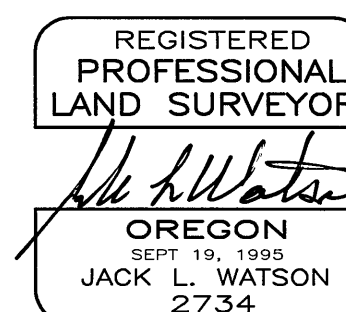

Renewal Date 6/30/2006