



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

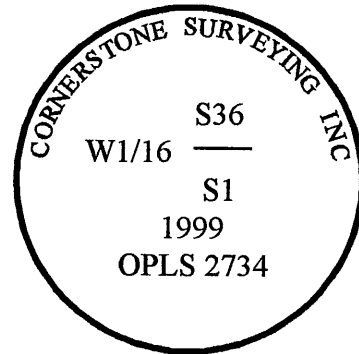

W1/16 Sec.1, T10S, R27E

Description of corner evidence found:
NONE

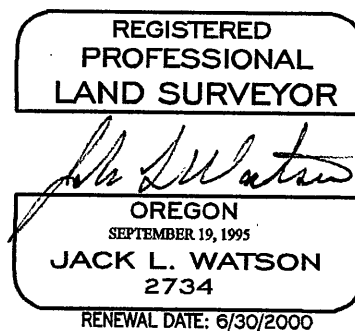

See Record Map of Survey No. 1521

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 26 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe a new bearing tree:

A 7" Juniper bears S8°W, 109.20 feet, marked W1/16S1BT.

A 6" Juniper bears N83°W, 78.20 feet, marked W1/16S36BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: August 3, 1999

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 6th day of AUG, 1999.
Robert E. Bogan by _____
(COUNTY OFFICIAL) (DEPUTY)