



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

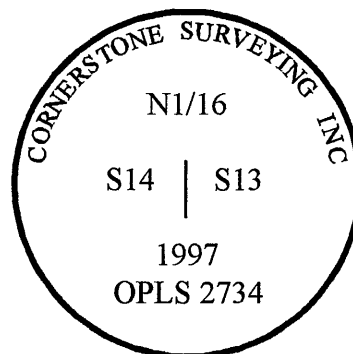

Description of corner evidence found:
NONE

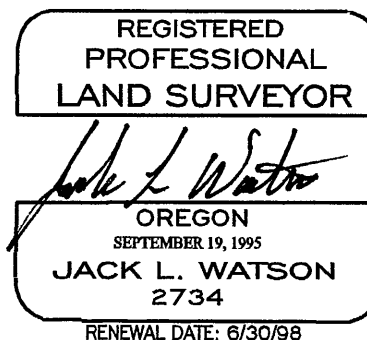

See Record Map of Survey No. 1449.

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 28 inches in the ground, built small mound of stone around cap. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 15" Juniper bears S58°E, 88.51 feet, marked N1/16S13BT.

A 6" Juniper bears N75°W, 114.00 feet, marked XBT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: August 13, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)