



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

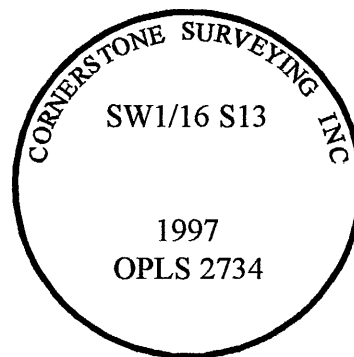

Description of corner evidence found:

Found an unrecorded 3/4" iron pipe with attached 3 1/2" brass cap, set by Jack Shaw, no date is indicated on the cap. This cap is stamped with the "Crown Z" logo. This cap bears N57°17'W, 39.97 feet from the corner position. I do not accept this monument for the corner.

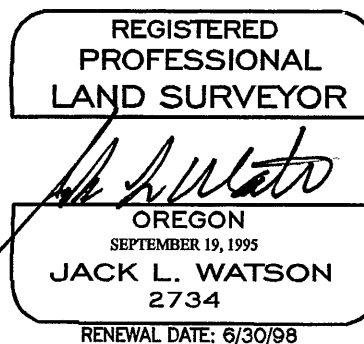

See Record Map of Survey No. 1449.

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe a new bearing tree:

A 16" Juniper bears N45°W, 64.59 feet, marked SW1/16S13BT.

From which I set a new reference monument:

A 5/8"x30" iron pin bears N31°E, 25.20 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: August 22, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)