


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: A.F. York, Deputy Surveyor, under Contract No. 394, dated May 25, 1881.

Surveyor General Record States: Set stone 14x9x7 inches, for 1/4 corner. Raised stone mound at corner.

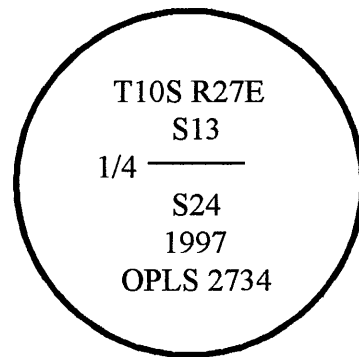

Description of corner evidence found:

Found stone 15x10x6 inches, marked 1/4S, with small stone mound west and alongside the corner stone.

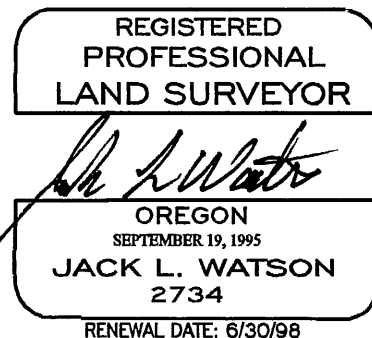

See Record Map of Survey No. 1449.

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2 1/2"x30" aluminum pipe with attached 2 1/2" aluminum cap, 20 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N42°E, 21.20 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S65°E, 11.85 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S26°W, 18.57 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N65°W, 14.46 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie references.

Date: August 13, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 1997.
Robert D. Leggett by _____
(COUNTY OFFICIAL) (DEPUTY)