

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner established by: E.A. Thatcher, Deputy Surveyor, under Contract No.325, dated June 4, 1879.

Surveyor General Record States: Set stone 18x14x8 inches, for corner to sections 18,19,13 & 24 raised stone mound at corner.


Retracement by: Aaron F. York, under Contract No.394, dated May 25, 1881.

Record states: I find corner to sections 13,24,18 & 19 a stone 18x14x6 inches in a stone mound.

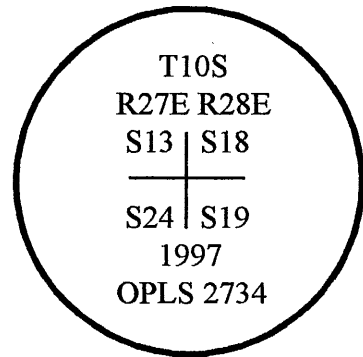

Description of corner evidence found:

After a diligent search I declare this corner lost. Several different fence lines have been built in this area over the years, the original corner stone is probably in one of the many rock jacks.

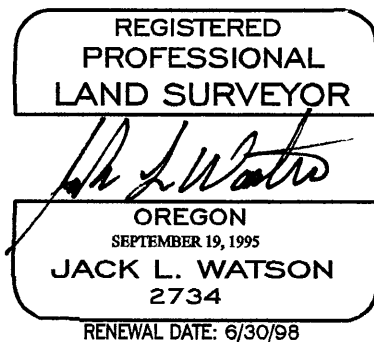

See Record Map of Survey No. 1449.

Description of monument and accessories set at corner location:

At single proportionate position I set a 2 1/2"x30" aluminum pipe with attached 2 1/2" aluminum cap, 28 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N72°E, 28.10 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S43°E, 15.28 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N45°W, 16.38 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

From which I scribe a new bearing tree:

A 7" Juniper bears S78°W, 63.29 feet, marked T10SR27ES24BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: August 18, 1997

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)