


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: A.F. York, Deputy Surveyor, under Contract No. 394, dated May 25, 1881.

Surveyor General Record States: Set stone 14x10x6 inches, for 1/4 corner. Raised stone mound at corner.

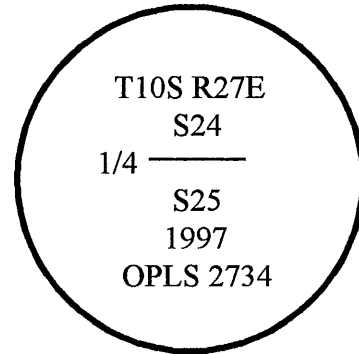

Description of corner evidence found:

None, this corner falls in the fill of a road.

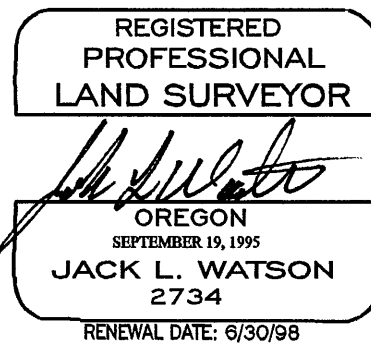

See Record Map of Survey No. 1449.

Description of monument and accessories set at corner location:

At single proportionate position I set a 2 1/2"x30" aluminum pipe with attached 2 1/2" aluminum cap, 24 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 5" Juniper bears S88°E, 36.37 feet, marked XBT.

A 8" Juniper bears S38°E, 28.12 feet, marked 1/4S25BT.

A 3" Juniper bears S86°W, 9.42 feet, marked XBT.

From which I set a new reference monument:

A 5/8"x30" iron pin bears N27°W, 18.71 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: August 13, 1997

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)