


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Not previously established

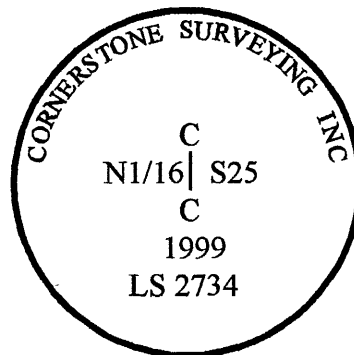

CN1/16 Sec.25 T10S,R27E

Description of corner evidence found:

Not previously established

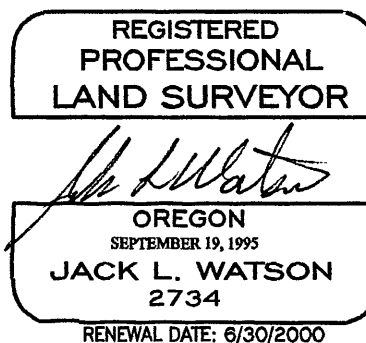

See Record Map of Survey No. 1500

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 5" Juniper bears S8°W, 15.43 feet, marked XBT.

A 10" Juniper bears N42°E, 36.35 feet, marked CN1/16S25BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: January 11, 1999

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 14 day of JAN, 1999.
Robert D. Bagnall by _____
(COUNTY OFFICIAL) (DEPUTY)