


CORNER RESTORATION

CORNER N1/4, SECTION 35 TWP 10S RANGE 27E

ORIGINAL SURVEY BY: Aaron York

CONTRACT NO: 394

CONTRACT DATE: May 25, 1887

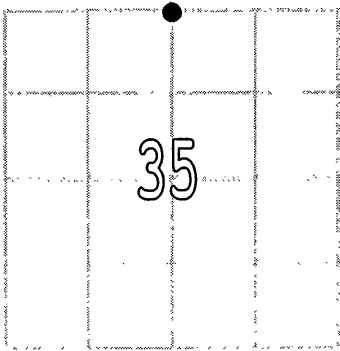

ORIGINAL DESCRIPTION

Set stone 12"x8"x6" for 1/4 sec. cor. Raised stone mound at corner.

RESTORATION BY, STAMP AND DATE

Kenneth H. Delano Jr., P.L.S.
Staff Surveyor
Ferguson Surveying & Engineering

Monument set on May 24, 2001

**RECEIVED AND
FILED**

July 3, 2001
OFFICE OF COUNTY SURVEYOR
Attest: *Robert A. Baggett*



RENEWAL DATE 12/31/2001

EVIDENCE FOUND

Fd. U.S.G.L.O. Brass Capped Monument set at proportionate measure, from which
A 12" Juniper bears N61°W, 26.4 ft.
A 9" Pine bears S18°E, 57.4 ft.

NOTE: After measuring the north line of Section 35, this corner was found to be S77°43'39"W, 48.90 ft. from the proportionate position. This monument was set in 1960 and the controlling monuments (NE & NW Corners of Section 35) were set in 1955. A search was made around the proportionate position for the original corner and no evidence was found. Stamped "AM" on the Brass Cap and set new monument.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At Proportion measure, set a 2-1/2" dia. x 30" aluminum pipe
with a 3-1/4" dia. aluminum cap, stamped as shown in the "DIAGRAM",
20" in the ground, raised a mound of earth and stone.

From which:

A 12" Juniper bears N16°W, 43.2 ft., scribed 1/4 S26 BT
A 6" Juniper bears N32°E, 29.3 ft., scribed 1/4 S26 BT
A 14" Pine bears S10°E, 52.3 ft., scribed 1/4 S35 BT
A 14" Pine bears S47°W, 81.5 ft., scribed 1/4 S35 BT
All bts with Aluminum chaining nail.

DIAGRAM
T10S R27E
S26
1/4-----
S35
2001
PLS 49865

Measurements to accessories taken with a magnetic compass, declination 18° East, and distances measured with a Leica TCA 1600 Total Station.

SEE GRANT COUNTY MAP OF SURVEY NO. 1602