

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Aaron F. York, Deputy Surveyor, under Contract No. 335, dated August 11, 1879.

Surveyor General Record States: Set stone 23x21x9 inches, for 1/4 corner stone mound at corner.



Description of corner evidence found:

Found stone 24x19x10 inches, marked 1/4 on west face.

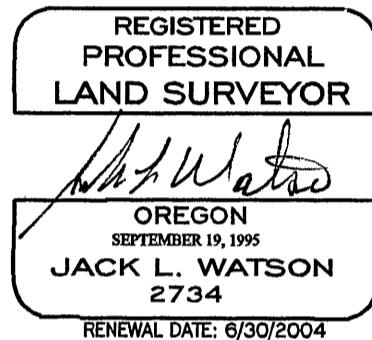

See Record Map of Survey No. 1646

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 5/8"x30" iron pin with attached 2" aluminum cap, surrounded by a mound of stone. Placed original marked stone north alongside pin. The cap is stamped as shown in the diagram.

From which:

- A 7" Juniper bears N72°E, 4.2 feet, marked 1/4S33BT.
- A 14" P. Pine bears S2°E, 24.5 feet, marked 1/4S33BT.
- A 15" Juniper bears N83°W, 4.7 feet, marked 1/4S32BT.
- A rock out crop marked XBO bears S72°E, 11.9 ft.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: September 19, 2002

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 15 day of OCT, 2002.
Robert H. Beatty by _____
 (COUNTY OFFICIAL) (DEPUTY)