

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established in 1881 by Robb and Gradon, under Contract No. 383 dated March 26, 1881.

Original notes state: 40 ch. set basalt stone 15 x 12 x 5 for 1/4 Sec. Cor.

From which:

- A pine 7" dia. bears S 20° W, 9 lks. dist.
- A pine 8" dia. bears S 12° E, 8 lks. dist.

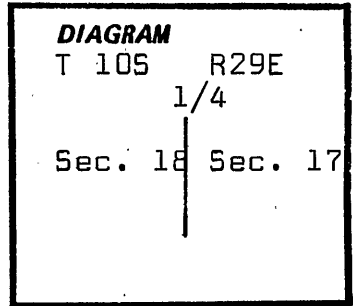

Description of corner evidence found:

Found a stone 12 x 10 x 3 (broken), no marks visible, a small mound of stone.

From which

A pine 28" dia., live and in good condition, blaze visible and healed over, bears S 12° E, 5.3 ft. (8 lks)

A pine 12" dia., live, blaze has been opened up, with scribing visible "1/4" bears S 20° W, 6 ft. (9 lks)

Accepted stone in mound as the position of the 1/4 corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 30" x 2-1/2" iron pipe with 2-1/2" brass cap, marked as shown 25" in the ground, and placed a ring of stone around pipe.

From which:


A pine 12" dia., scribed 1/4 S 17 BT, bears S 57° E, 19.3 ft. S 18 • S 17

A pine 10" dia. scribed 1/4 S 18 BT, bears N 28° W, 62.5 ft.

Set steel fence post 2' Southerly from pipe, with warning sign attached.

Nailed brass washers, stamped PLS 848 to each BT.

Used a staff compass with 20° E, declination and steel chain to locate Bearing Trees.



I hereby certify the above corner was established, as herein described, in April 1979.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Brad Herberger
Witness

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of Surveyor County of Grant
State of Ore. I hereby certify that the within instrument was filed in this office
for record on the 23 day of May, 1979
Robert D. Beyer by _____
(COUNTY OFFICIAL) (DEPUTY)