


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by W.H. Byars under General Land Office Contract No. 197 dated July 14, 1873.

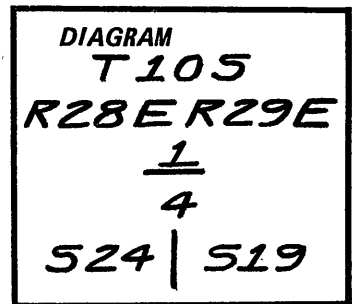

Surveyor General's records state:

Set volcanic stone 16x12x8 for quarter section corner.

Description of corner evidence found:


At assumed corner location found a basaltic stone 16" x 12" x 8" set 10" in ground in well sodded stone mound of 6 stones, marked "1/4" on west face and "+" on top. A 5/8" X 48" long iron rod not of record was driven in alongside original stone.

Description of monument and accessories established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, at the location of the original marked stone, set a 30" long 2 1/2" O.D. aluminum pipe 24" in ground with 3 1/4" aluminum cap marked:

Marked new bearing trees:

A Ponderosa Pine, 12" DBH, bears North 60° East, 51.9 feet, scribed "1/4 S19 BT";
A Juniper, 8" DBH, bears North 16° West, 53.4 feet, scribed "1/4 S24 BT".
Raised stone mound 2 feet base to cap and buried original stone north of cap. Painted 6" red band and faces red and nailed brass washer stamped "LS 1026" and signs 54-4 and 54-3 on bearing trees. Set steel post with sign 54-4 alongside cap.



I hereby certify the above corner monument was re-established as herein described on July 27, 1981.

Witnesses: William S. DeGroot
William S. DeGroot, LS 1633

Shelby H. Griggs
Shelby H. Griggs, Chainman

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 1st day of Oct, 1981
Robert L. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

