


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Bamford Robb under joint General Land Office Contract No. 383 dated March 26, 1881.

Surveyor General's records state:

Set basalt stone 15x12x9 for 1/4 sec. cor. from which a juniper 14 in. dia. bears N78°E 116 lks dist. a pine 20 in. dia. bears S88°W 43 lks dist.

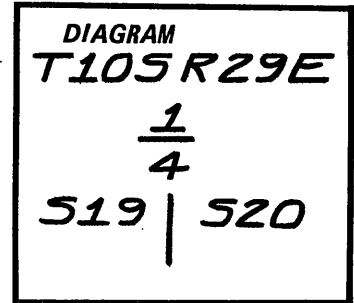

Description of corner evidence found:

At assumed corner location, found the original NE BT, a 19" Juniper with visible scribing "1/4 S BT" bears from re-established corner North 54° East, 77.2 feet to face. Found the original SW BT, a 21" dia. Ponderosa Pine stump 18" high with portion of axe blazed face bears from re-established corner South 63° West, 28.7 feet to face. The original stone was not found. A small stone mound was found at record bearing and distance from NE BT but was of recent origin and not accepted. The corner was re-established at proportional record distances from original bearing trees, at which point the BT faces orient toward the corner point. Original surveyor's bearings to bearing trees are consistently inaccurate.

Description of monument and accessories established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO record as noted, at the location of proportional record distances from BT faces, set 30" long 2 1/2" O.D. aluminum pipe 18" in ground to bedrock with 3 1/4" aluminum cap marked:


Marked new bearing trees:

A Juniper, 7" DBH, bears North 66° East, 26.0 feet, scribed, "1/4 S20 BT"; a Juniper, 4" DBH, bears North 27° West, 17.3 feet, scribed, "1/4 S19 BT".

From which the original NE bearing tree:

A Juniper, 19" DBH, bears North 54° East, 77.2 feet to face visible scribing "1/4 S BT".

Raised stone mound 3 ft. base to cap. Painted 6" red band and faces red and nailed signs 54-3 and 54-4 to all bearing trees. Nailed brass washer stamped "LS 1026" on new BT's. Set steel post with sign 54-4 west of cap.

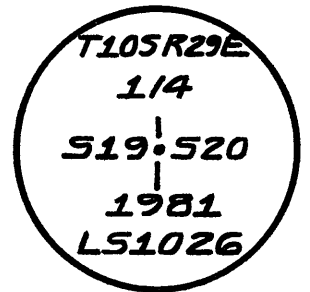

I hereby certify the above corner monument was re-established as herein described on July 30, 1981.

Witnesses: William S. DeGroot
William S. DeGroot, LS 1633
Shelly H. Griggs
Shelly H. Griggs, Chainman

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 1st day of Oct, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

