


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. O-19

History of original corner establishment:

Corner not previously established.

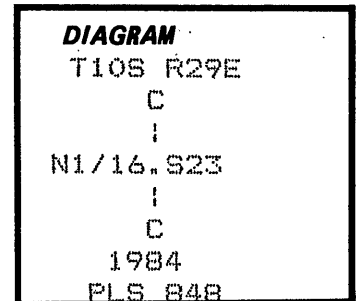

Description of corner evidence found:

Corner not previously established.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 2-1/2"x30" aluminum pipe with 3-1/2" aluminum cap, stamped as shown on the **DIAGRAM**, SET 8" in the ground, and raised a mound of stone & earth around the pipe.

From Which:

A Pine, 8" dia. Bears, S77°E., 19.7 ft., scribed: C-N 1/16 S23 BT

A Juniper, 13" dia. Bears, N50°W., 6.0 ft., scribed: C-N 1/16 S23 BT

Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.

Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing Tree Sign above blaze, and warning sign on back of each tree. Painted a 6" red band at breast ht. around each tree. Set steel fence posts with warning & Boundary Signs, West 7 ft., & East 4 ft., from the corner.

Refer to map of survey No. 875

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Work by D.M. Ferguson, PLS 848, Mt. Vernon Ore.
On Nov. 5, 1984

Witnessed by J. David Brinton, PLS 2065

Office of Surveyor County of Grant
State of Oregon, hereby certify that the within instrument was filed in this office
for record on the 22 day of July, 1985
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)