


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally set in a survey, dated 7/4/80, by Clell Goodwin, PLS 1078, for the USFS under cadastral contract No. 53-04H1-9-7631N.

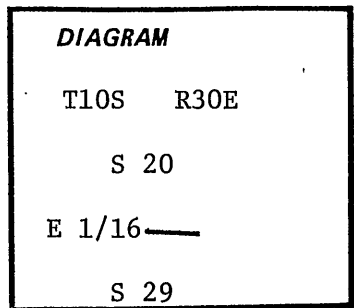

Description of corner evidence found:

None



Description of monument and accessories | established to perpetuate the original location of this corner: At the corner location as determined by the aforementioned survey, I set a 2½" x 30" aluminum pipe with a 3½" cap and a magnet in the base marked as shown:

New Sec. 20 BT:

Marked 12" fir with upper and lower axe faces.
Bears N 1° E 6.0 ft. Scribed "E 1/16 S20 BT".
Tagged with brass washer marked "PLS 1078".

New Sec. 29 BT:

Marked 11" fir with upper and lower axe faces.
Bears S 31°30' W 13.5 ft. Scribed "E 1/16 S 29 BT".
Tagged with brass washer marked "PLS 1078".

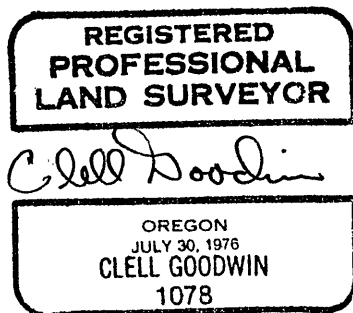

I hereby certify the above corner monument was re-established as herein described on May 29, 1980.

CLELL GOODWIN, P.L.S.
Witness: /s/ Jeff Clark

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 31 day of Oct, 1980
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)