

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: W.H. Byars, Deputy Surveyor,  
under Contract No. 197, dated July 14, 1873.

Surveyor General Record States:

Set stone 14x12x3, for corner to Sections 34, 35, 2 & 3.

Corner set by Douglas Ferguson, PLS 848 by proportion, See Survey  
No. 784, dated Aug 1982-Aug 1983. Set 2" alum. pipe and cap  
From which a Pine 15" diam. bears N41°W, 65.3 ft. scribed  
T10SR30ESCS34BT.


A Pine 10" diam. Bears N54°E, 60.3 ft. scribed T10SR30ESCS35BT

A steel fence post with warning sign 5 ft. north.



Description of corner evidence found:

Found bearing tree by Ferguson, N15°40'W, 64.0 ft.  
to face, record (N41°W, 65.3 ft.). No evidence of the  
alum. monument, the marked stone, the NE bearing  
tree or the steel fence post were found.

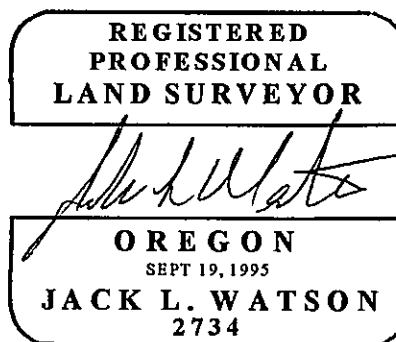

Renewal Date 6/30/2014

Description of monument and accessories set at corner location:

I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, at single proportion and on the  
latitudinal curve between the standard corners at the S1/4 of Section 34 and the SE corner of  
Section 35. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 8" P.Pine bears N47°E, 18.5 ft., marked T10SR30ES35SCBT.

A 6" Juniper bears S61°E, 12.4 ft., marked XBT.

A 12" Juniper bears S35°W, 8.1 ft., marked XBT.

A 10" Juniper bears N82°W, 36.9 ft., marked T10SR30ES34SCBT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's  
and magnetic compass, with 14° E. declination. See Grant County Survey No. 1951.

Date: June 15, 2012

Office of County Surveyor County of Grant  
State of OR I hereby certify that the within instrument was filed in this office  
for record on the 2nd day of July, 2012.  
[Signature] by [Signature]  
(COUNTY OFFICIAL) (DEPUTY)