

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
New Corner

\*

DIAGRAM  
T10S R31E

Description of corner evidence found:

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2x28" aluminum monument 8" in the ground in a mound of stone.

I establish new bearing trees:

A 14" multi-stemmed Juniper bears S 5-3/4° E, 76.6 ft, scribed S1/16S7BT.


A 1x" aluminum cap on 5/8" rebar bears S 55°17' W, 20.36 ft, marked RM S1/16S12 20.36FT PLS1918.

T10S  
R31E R32E  
S1/16  
S12157  
PLS1918  
1988

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Sun Cadastral Survey, Cont No. 53-04H1-7-4011  
Field Book: 4-36  
Work accomplished: 8/23/88  
Witnesses: Louise Parsons, Douglas Parsons  
Job No.: 87221

PARSONS SURVEYING  
1915 S.E. Stone Street  
Corvallis, OR 97333  
(503) 752-7515

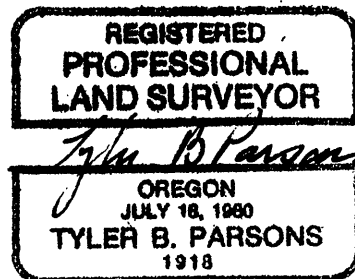

Office of COUNTY SURVEYOR County of GRANT  
State of OREGON, I hereby certify that the within instrument was filed in this office  
for record on the 24th day of Feb, 1989

Robert D. Bayett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)