

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: *

The original corner was established in 1880 by Bamford Robb under Contract No. 366
The original notes state:
I run East on true line on south boundary of sec 31, T10S, R31E 80.00 Set post for Standard cor to secs 31 and 32 from which
A pine 15 ins dia bears N60°W 8 lks dist.
An alder 8 ins dia bears N15°E 12 lks dist.

DIAGRAM
T10S R31E
SC
S311S32

The line was retraced in 1881 by Rufus S. Moore under Contract No. 382.
The notes state:
East on S bdy of Sec 31
79.61 Point 10 lks S of Standard cor to Secs 5,6,31,32.

Description of corner evidence found:

Found no evidence of the original corner.

Description of monument and accessories I establish to perpetuate the original location of this corner:

I reestablish this corner by single proportion. Set a 2-1/2"x30" aluminum monument 22" in the ground.
I establish new bearing trees:
A 9" Fir bears N 74°34'E, 25.1 ft, scribed SCT10SR31ES32BT.
A 16" Fir bears N 14°50' W, 9.6 ft, scribed SCT10SR31ES31BT.


T10S R31E
SC
S311S32

PLS1918
1989

Sun Cadastral Survey
Contract No.: 53-04H1-7-4011
Project No.: 8722JB
Field Book: 7-36
Work Accomplished: 4/10/89
Witnesses: Louise Parsons

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

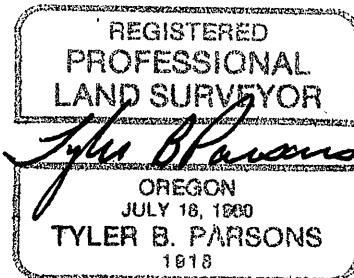

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 26 day of June, 1987

Robert D. Smith by _____
(COUNTY OFFICIAL) (DEPUTY)