


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by H.D. Gradon & B. Robb
Set basalt stone 18"X15"X6" in mound of stone for 1/4 Section
corner from which:
a tamarack, 18" in diam., bears N50°W, 10 lks.

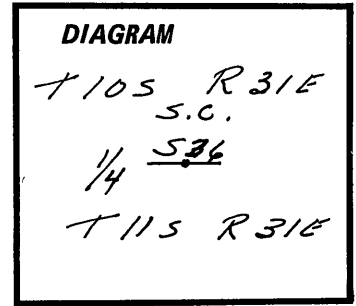

Description of corner evidence found:

Found original bearing tree
16" Tamarack, N65°W, 6.6', Scribed 1/4S

Found original stone 16"X12"X8"

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3" Aluminum Cap on 2 1/2" Aluminum pipe 30" long & buried 27" in ground with mound of stone to cap. Buried original stone along side monument.

New Bearing Trees:

10" Fir, N58°E, 17.8', Scribed 1/4 S36, B.T.
6" Black Pine, N79°W, 21.2', Scribed 1/4 S36, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign, 4' North of monument. Painted red band around bearing trees. Tagged trees with L.S. 980 washer.


MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
Harold Pavey, Chainman

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Edgar W. Graves

OREGON
JULY 14, 1972
EDGAR W. GRAVES
980

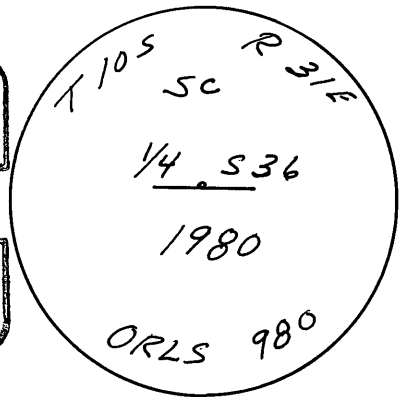

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 2 day of Oct, 1980
Robert D. Dept by _____ (DEPUTY)
(COUNTY OFFICIAL)