


CORNER RESTORATION

NW cor.
CORNER Sec. 13 **TWP** 10 S. **RANGE** 32 E.

ORIGINAL SURVEY BY: Robb & Gradon
CONTRACT NUMBER: 383
CONTRACT DATE: March 26, 1881

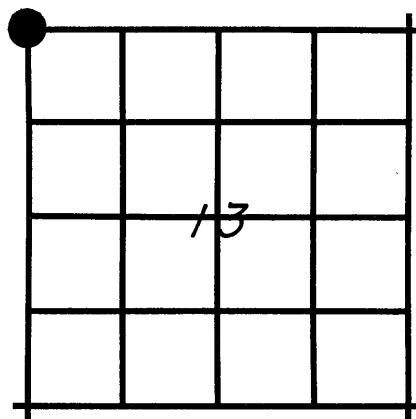

ORIGINAL DESCRIPTION: Set post for cor. to Secs. 11, 12, 13 & 14, from which
 A Pine 30 in. diam., bears N. 80° W., 70 lks. dist. A Pine 14 in. diam. bears N. 58°
 E. 24 lks. dist. A Pine 24 in. diam., bears S. 45° E., 75 lks. dist. A pine 12 in.
 diam., bears S. 60° W., 65 lks. dist. This corner was remonumented in Aug., 1958 by
 Howard E. Taylor R. P. E. #2891, Taylor's Record states: I set stone, 16x9x5 in
 small mound at intersection of govt. Note distances from orig. NW & SE BTs. Orig.
 30" Pine (N. 30° W.) N. 20° W. 46.2 ft. now 34". Orig. 14" Pine N. 53° E., 18.0 ft.
 gone. Falls in R.R. grade, orig. 24" Pine S. 45° E. 50.0 ft. now stump with scribe.
 Orig. 12" Pine S. 60° W. 42.9 ft. Gone. I scribed new BTs as follows: 6" Fir
 N. 72° W. --"S11" BT--8" Fir N. 54° E., 46.3 ft. "S12 BT" 8" Pine S. 62° E., 37.5 ft.
 "S13 BT" 7" Fir S. 22° W. ft. "S14 BT"

RESTORATION BY, STAMP AND DATE:

**RECEIVED AND
 FILED**

OCT 2 1984

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett

R. D. Bagett
 J. L. Watson
 J. L. Meyerholz

 Aug. 28, 1984

OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
 Attest: *Jennie Lawrence*

OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598

Grant County Surveyor.

EVIDENCE FOUND: I found Taylor's stone set in a mound of stone, from which:
The Original Bearing Trees:
 A 24" pine stump bears S. 40° E., 50.4 ft., mkd. S13BT on blaze that has fallen
 from stump.
 A 12" dead and down pine bears S. 62° W., 35.8 ft. mkd. S14BT. This tree is uprooted.
 A 34" pine snag bears N. 20° W., 46.2 ft. mkd. S11BT.
Taylor's Bearing Trees:
 A D. Fir 10" diam., bears N. 72° W., 14.8 ft. blaze healed, no mks. visible.
 A Pine 18" diam., bears S. 62° E., 37.6 ft. blaze healed, no mks. visible.
 A D. Fir 9" diam., bears S. 18° W., 12.3 ft., blaze healed, no mks. visible

 I did not measure to Taylor's BT in Sec. 12.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

I accept Taylor's stone for the position of this section corner. At the corner point:

Set a 1½"x30" galvanized iron pipe 24 inches in the ground with brass cap marked as shown, from which I scribe a NEW BEARING TREE:

A Pine 12 ins. diam., bears N. 48° E., 3.4 ft., mkd. T10SR32E S12 CSBT.

I buried Taylor's stone alongside the iron pipe and surrounded pipe with stones to top of cap.

Used magnetic compass with 20° E. variation and steel tape, measuring to face of blaze or heal mark on all BTs.

MONUMENT MARKED

