


CORNER RESTORATION

South $\frac{1}{4}$ cor.
CORNER Sec. 13 **TWP** 10 S. **RANGE** 32 E.

ORIGINAL SURVEY BY: Robb & Gradon
CONTRACT NUMBER: 383
CONTRACT DATE: March 26, 1881

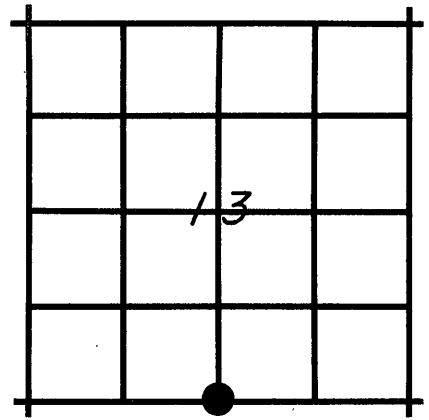

ORIGINAL DESCRIPTION:

Set stone 14x12x4 for $\frac{1}{4}$ sec. cor.
 from which
 A pine 40 in. diam., bears S. 15° W., 128 lks. dist.
 A pine 12 in. diam., bears N. 42° E., 170 lks. dist.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
 J. L. Watson
 J. L. Meyerholz

Aug. 28, 1984

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett

OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598

**RECEIVED AND
 FILED**

OCT 2 1984

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
 Attest: *Lemmie Lawrence*

Grant County Surveyor

EVIDENCE FOUND:

Found original basalt corner stone 14x12x5 inches marked $\frac{1}{4}$ on North face, deeply set in ring of stone in meadow.
 from which The Original Bearing Tree:

A p. pine, 52 ins. diam., bears S. 15° W., 80.2 ft., no marks are visible in unhealed blazes. Both blazes are badly burned inside tree from fire of many years ago.

No evidence found of the other record BT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

I accept the position of the marked stone for the $\frac{1}{4}$ corner.

At the corner point: Set a 1 $\frac{1}{2}$ "x30" galvanized iron pipe 30 ins. in the ground with brass cap marked as shown:

from which I scribe a NEW BEARING TREE:

A p. pine 15 ins. diam., bears N. 49° E., 149.7 ft., mkd. $\frac{1}{4}$ S13 CSBT.

I buried original corner stone SE and alongside the iron pipe and surrounded pipe with a mound of stone to top of cap.

Used magnetic compass with 20° E. variation, and steel tape measuring to face of blaze of BTs at root crown.

MONUMENT MARKED

