

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

SEE 'GRANT C'
RECORD SURVEY
NO 1006

Index No. C-9

History of original corner establishment:


Corner originally established by Robb and Gradon under Contract No. 383 and dated March 26, 1881.

Original notes state:

Set post for 1/4 Sec Cor from which:

A pine 36 ins diam bears S75°W, 47 lks dist.

A pine 40 ins diam bears S20°E, 64 lks dist.



Description of corner evidence found:

Found an 18 x 6 x 6" basalt stone standing upright, marked "1/4" on East face from which:

A 37" ponderosa pine brs S18½°E, 43.0' with visible scribing on partially healed blaze (original bearing tree).

A 38" ponderosa pine brs S81½°W, 31.9' with blazed face (facing SE) but no visible scribes (original bearing tree).

Description of monument and accessories established to perpetuate the original location of this corner:

At position of found stone....

Set 2½" x 30" aluminum pipe with standard 3¼" USDA aluminum cap 24" in ground & surrounded with mound of earth & stone. Cap marked as shown in corner diagram. Buried corner stone in new mound.


New bearing tree established:

A 16" western larch brs N73½°W, 59.0' scribed 1/4S5 BT.

New bearing tree has a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 & 54-4 to each BT & painted face of blaze & 6" red band around each BT. Set steel fence post North of corner and attached sign 54-4.

Compass declination 18° East.

I hereby certify that the above corner was properly remonumented by me to U.S.F.S. standards and witnessed by Bill Quaempts on August 02, 1989.

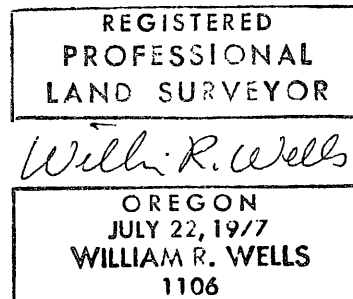

Office of.....County Surveyor.....County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 29 day of May, 1990
Robert D. Bayart by
(COUNTY OFFICIAL) (DEPUTY)