

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

*

The original corner was established by Herman Gradon in 1881 under Contract No. 383.

The original notes state:

North between secs 16 & 17

40.00 Set stone 16x10x6 for 1/4 sec cor from which

A pine 18 ins dia bears N30°E 86 lks dist

A pine 18 ins dia bears N30°W 89 lks dist

DIAGRAM

T10S R33E

1/4

S17°S16

Description of corner evidence found:

Found a 16x10x6 stone, no marks.

A 15" P.Pine stump bears N26°57'W 61.0ft (N30°W 89 lks).

Roothole of windfall P.Pine bears N27°30'E 60.0ft (N30°E 86 lks) scribed 1/4SBT.

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2-1/2x30" aluminum monument 20" in the ground in a mound of stone and buried the original stone on the North side.

T10S R33E

1/4

New bearing trees:

S17°S16

A 10" P.Pine bears N58°55'W 17.7ft scribed 1/4S17BT.

PLS1918

A 17" P.Pine bears N72°43'E 8.7ft scribed 1/4S16BT.

1989

Sun Cadastral Survey

Contract No.: 53-04H1-7-4011

Project No.: 8722LA

Field Book: 7-45

Work Accomplished: 4/30/89

Witnesses: Louise Parsons


New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING

1915 S.E. Stone Street

Corvallis, OR 97333

(503) 752-7515

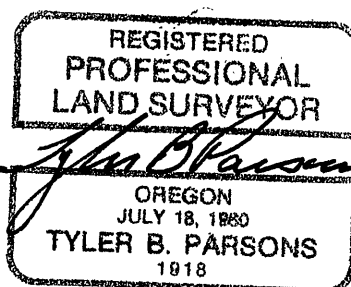

Office of COUNTY SURVEYOR

County of GRANT

State of OREGON

, I hereby certify that the within instrument was filed in this office for record on the 10 day of Aug, 1987

Robert D. Bayliff

(COUNTY OFFICIAL)

by

(DEPUTY)