

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner was established by Herman Gradon in 1881 under Contract No. 383.

The original notes state:

S89°41'W on true line between secs 17 & 20

39.84 Set stone 18x8x6 for 1/4 sec cor from which

A pine 20 ins dia bears S20°E 49 lks dist

A pine 24 ins dia bears N10°E 63 lks dist

DIAGRAM

T10S R33E

S17

1/4---

S20

Description of corner evidence found:

Found 18x8x6 stone, possible mark 1/4.

A 20" P.Pine stump, top to West, bears N11°25'E 43.8ft (N10°E 63 lks) scribed 1/4SBT.

A 20" P.Pine stump bears S20°57'E 27.8ft (S20°E 49 lks) scribed 1/4SBT.

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2-1/2x30" aluminum monument 22" in the ground in a mound of stone and buried the original stone on North side.

New bearing trees:

A 9" P..Pine bears N9°05'W 42.7ft, scribed 1/4S17BT.

An 8" P.Pine bears S76°48'W 16.4ft scribed 1/4S20BT.

T10S R33E

S17

1/4---

S20

PLS1918

1989

Sun Cadastral Survey

Contract No.: 53-04H1-7-4011

Project No.: 8722LA


Field Book: 7-45

Work Accomplished: 4/30/89

Witnesses:Louise Parsons

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

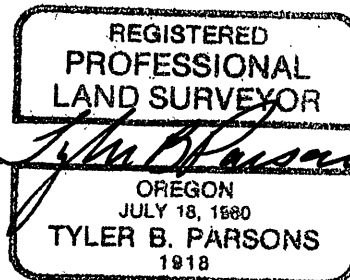

Office of COUNTY SURVEYOR

County of GRANT

State of OREGON

, I hereby certify that the within instrument was filed in this office for record on the 10 day of Aug, 1981

Robert D. Baggett

(COUNTY OFFICIAL)

by

(DEPUTY)