

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

*

The original corner was established by Herman Gradon in 1881 under Contract No. 383.

The original notes state:

North on range line East boundary of Sec 24

40.00 Set stone 11x10x6 in stone mound for 1/4 sec cor from which
A pine 40 in dia bears S40°W, 12 lks dist.

DIAGRAM

T10S

R32E R33E

1/4

S24119

Description of corner evidence found:

Found a 11x10x6" stone marked 1/4 in an East/West fenceline.

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2-1/2x30" aluminum monument 20" in the ground in a mound of stone and buried the original stone on the North side.

New bearing trees:

A 16" P.Pine bears S50°19'W 108.0ft scribed 1/4S24BT.

A 1-1/2" aluminum cap on rebar bears N78°07'E 33.62ft marked
RM 1/4S19 PLS1918.

T10S
R32E R33E
1/4
S241S19
PLS1918
1989

Sun Cadastral Survey

Contract No.: 53-04H1-7-4011

Project No.: 8722LA


Field Book: 7-57

Work Accomplished: 5/16/89

Witnesses: Louise Parsons

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

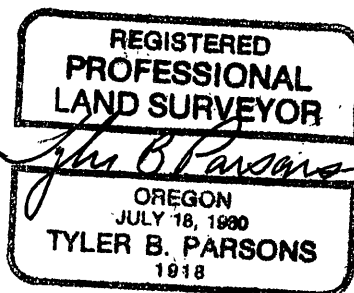

Office of COUNTY SURVEYOR

State of OREGON

County of GRANT

, I hereby certify that the within instrument was filed in this office
for record on the 10 day of Aug, 1989

Robert D. Sager by _____

(COUNTY OFFICIAL)

(DEPUTY)