


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by Robb and Gradon under General Land Office Contract No. 383. Surveyor General's records state:
 Set a stone 17"x14"x8" for 1/4 Section Corner.
 From which:
 A pine 8" dia. bears S 60° E, 42 lks. dist.
 A pine 24" dia. bears N 30° E, 103 lks. dist.



Description of corner evidence found:

Found a basalt stone 17"x14"x8" set in mound of stone with 1/4 chiseled on face. Stone is accepted as corner position.
 A pine 18" dia. bears S 58° E, 28.3 ft., scribing visible, tree live, in good condition.
 A pine 30" dia. bears N 32° E, 68.0 ft., scribed 1/4 S Bt.
 Tree in good condition.



Description of monument and accessories | established to perpetuate the original location of this corner:

Set 30"x3" aluminum pipe with 3 1/2" aluminum cap, marked as shown, 12" in the ground and raised a mound of stone around the pipe.
 From which:
 A pine 16" dia. bears N 68° 50' W, 48.0 ft., scribed 1/4 S 19 BT.
 A pine 14" dia. bears S 25° W, 66.3 ft., scribed 1/4 S 30 BT.
 Nailed brass washers stamped PLS 848 and bearing tree signs to all bearing trees. Painted red band around all bearing trees.
 Set steel fence post 5 ft. East with Boundary and Warning signs attached.

Witnesses to above corner:

 M. Ferguson

 S. Hutchison

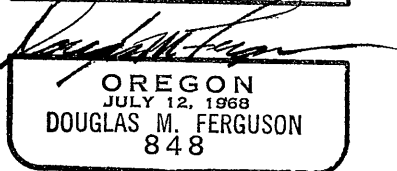

Office of..... Co. Surveyor..... County of..... Grant
 Oregon
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the 20 day of Aug, 1980
 Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)