


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

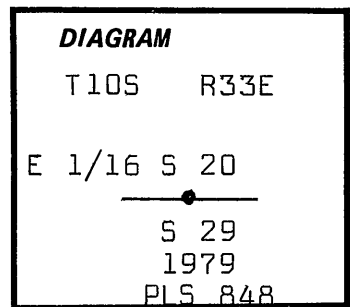

Description of corner evidence found:

N/A

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 30"x3" aluminum pipe with 3 1/2" aluminum cap, stamped as shown, 26" in the ground.

From which:

A pine 14" dia. bears S 36° W, 28.8 ft. scribed E 1/16 S 29 BT.


A pine 16" dia. bears N 7° W, 42.5 ft. scribed E 1/16 S 20 BT.

Nailed brass washers and bearing tree signs to all bearing trees.

Painted red band around all bearing trees.

Set steel fence post 5 ft. South and East with Boundary and Attention signs attached.

Witnesses to above corner:



\_\_\_\_\_  
D. Brinton

\_\_\_\_\_  
M. Ferguson

\_\_\_\_\_  
S. Hutchison

Office of..... Co. Surveyor..... County of..... Grant.....  
State of..... Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the 20 day of Aug., 1980  
Robert H. Beggs by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)