


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

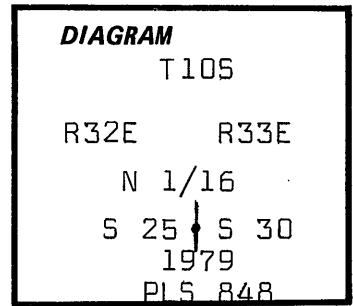

Description of corner evidence found:

N/A

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 30"x3" aluminum pipe with 3 1/2" aluminum cap, stamped as shown, 24" in the ground.

From which:


A pine 10" dia. bears N 16° 34' W, 42.2 ft. scribed N 1/16 S 25 BT.

A pine 16" dia. bears S 57° 49' E, 46.6 ft. scribed N 1/16 S 30 BT.


Nailed brass washers stamped PLS 848 and bearing tree signs to all bearing trees. Painted red band around all bearing trees.

Set steel fence post 5 ft. West from pipe with ATTENTION and BOUNDARY signs attached.

Witness to above corner:



D. Brinton



Office of..... Co. Surveyor..... County of..... Grant
Oregon
State of....., I hereby certify that the within instrument was filed in this office
for record on the... 20... day of... Aug... 19... 80
Robert M. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)