


31

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

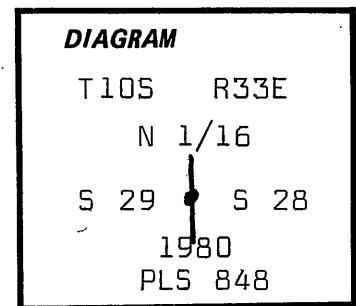

Description of corner evidence found:

N/A

Description of monument and accessories established to perpetuate the original location of this corner:

Set 30"x3" aluminum pipe with 3 1/2" aluminum cap, stamped as shown, 8" in the ground and raised mound of stone and earth around pipe.

From which:

A fir 16" dia. bears N 1° 30' E, 81.8 ft. scribed N 1/16 S 28 BT.

A pine 14" dia. bears N 22° W, 142.5 ft. scribed N 1/16 S 29 BT.

Nailed brass washers stamped PLS 848 and bearing tree signs to all bearing trees. Painted red band around all bearing trees.

Set steel fence posts 46' N & 6' East, Bdry & warning signs attached.

Witnesses to the above corner:

D. Brinton

P. Negus

REGISTERED
PROFESSIONAL
LAND SURVEYOR

[Signature]
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of..... Co. Surveyor..... County of..... Grant.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 20 day of Aug., 1980.
Robert D. Segel by _____
(COUNTY OFFICIAL) (DEPUTY)