


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by Robb and Gradon under General Land Office Contract No. 383.

Surveyor General's records state:

Set stone 12"x8"x6" for 1/4 Section Corner, from which: A pine 16" dia. bears S 70° W, 82 lks. dist.
A pine 16" dia bears S 20° E, 27 lks. dist.



Description of corner evidence found:

Found a basalt stone 15"x8"x7" set in a mound of stone with 1/4 visible on South face. The position of the stone is accepted as the position of the 1/4 corner.

A rotten down pine 24" dia. with blaze and unlegible scribing visible bears S 77° W, 54.8 ft.

A rotten down pine with blaze visible bears S 15° E, 14.4 ft.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 30"x3" aluminum pipe with 3 1/2" aluminum cap, stamped as shown, 8" in the ground and raised a mound of stone and earth around pipe.

From which:



A juniper 8" dia. bears N 75° E, 30.6 ft. scribed 1/4 S 30 BT.

A pine 11" dia. bears N 65° W, 91.1 ft. scribed 1/4 S 25 BT.

Nailed brass washers stamped PLS 848 and bearing tree signs on each bearing tree. Red band painted around each bearing tree.

Set steel fence post 7 ft. North from corner with ATTENTION signs attached.

Witnesses to above corner:

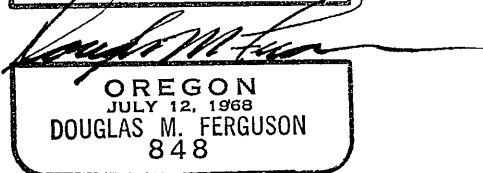

D. Brinton

P. Negus

Office of Co. Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 20 day of Aug 1980
Robert D. Degett by
(COUNTY OFFICIAL) (DEPUTY)