


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone 12"x 12"x 5", from which:
a pine 30" diam., bears S.50 W., 26 lks. distant,
a pine 16" diam., bears N. 45E., 72 lks. distant.



Description of corner evidence found:

Found a stone 12"x 12" x 5" and original Bearing Trees:
tree in S.W. quadrant is fallen, scribes partially visible,
tree in N.E. quadrant is leaning, scribes partially visible.

Description of monument and accessories established to perpetuate the original location of this corner

Set a 2½"x 30" iron post, 24" in the ground, with brass cap.
Deposited stone at base.


Marked new Bearing Trees as follows:
a pine 18" diam., bears N.36 W., 143.6 lks., marked; ¼ S.25, B.T.
a pine 8" diam., bears S.42W., 8.2 lks., marked; ¼ S.36, B.T.

REGISTERED
OREGON
LAND SURVEYOR

Duane I. Griffith

JULY 10, 1964
DUANE I. GRIFFITH
644

Cap marked:

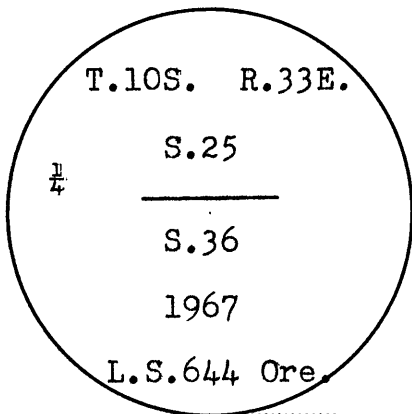

Office of County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of; 19....., at..... o'clock m., (signed)
..... by
(COUNTY OFFICIAL) (DEPUTY)

RECEIVED AND
FILED

NOV 29 1967

JOHN LIVEIRA, County Clerk

By..... Deputy

V-23