

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone, 16"x 10"x 9", from which:

a pine 10" diam., bears S.45 W., 8 lks. distant,  
a pine 10" diam., bears N.45 W., 12 lks. distant.

DIAGRAM

T.10S. R.34E.

$\frac{1}{4}$  S.30  
S.31

Description of corner evidence found:

Found original stone marked  $\frac{1}{4}$  on N. face.

Found original Bearing Trees

a stump in N.W. quadrant, tree is down, partial scribes visible.

Description of monument and accessories established to perpetuate the original location of this corner

Marked new Bearing Tree:


a pine 7" diam., bears N.53 E., 61.5 lks. distant, marked,  $\frac{1}{4}$  S.30, B.T.

REGISTERED  
OREGON  
LAND SURVEYOR

JULY 10, 1964  
DUANE I. GRIFFITH  
644

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the ..... day of .....; 19....., at..... o'clock .....m., (signed)  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

See Remon Sheet filed  
April 29, 1986

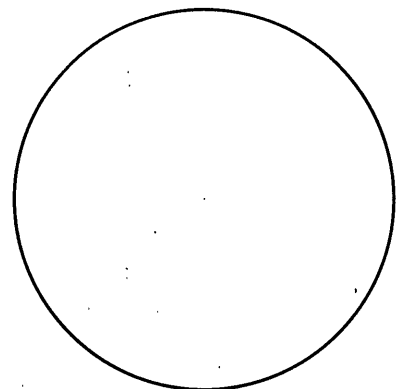

RECEIVED AND  
FILED  
JUN 29 1967  
JOHN L. VIEIRA, County Clerk  
By..... Deputy