

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Set by Robb and Graden in 1881, under contract #383 dated 3/26/1881.

Set a stone, 14"x 10"x 6", from which:

a pine 20" diam., bears S.30 W., 58 lks. distant,
a pine 16" diam., bears N.55 E., 106 lks. distant.

DIAGRAM

T.10S., R.34E.

$\frac{1}{4}$ — S.29
S.32



Description of corner evidence found:

Found original Bearing Trees:

tree in S.W. quadrant, scribes partially visible.
blaze is evident, overgrowth covers scribes.

Description of monument and accessories established to perpetuate the original location of this corner

None.

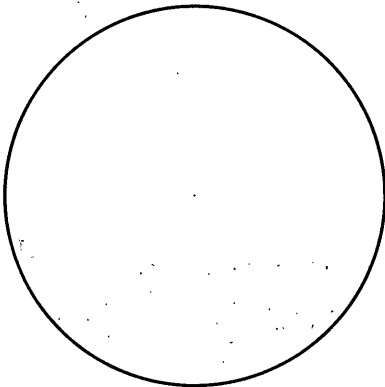

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the day of.....; 19....., at..... o'clock m., (signed)
..... by
(COUNTY OFFICIAL) (DEPUTY)

See remon that filed
April 29, 1986

RECEIVED AND
FILED
NOV 9 1967
JOHN L. VEIRA, County Clerk