


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-11

History of original corner establishment:

Corner was originally established by Herman D. Gradon under GLO contract No. 416 during October, 1881. Surveyors General's notes state: "Set a granite stone 14x12x5 ins. 9 ins. in the ground, for 1/4 Sec. Cor. marked 1/4 on N. face; from which a black pine 8 ins. diam. bears N10°W., 19 lks dist. marked 1/4S BT. A black pine 8 ins. diam. bears S20°W., 13 lks dist. marked 1/4S BT.



Description of corner evidence found:

Found 14x12x5 inch stone. Could not find markings.
 Found down and rotten Lodgepole Pine with scribed 1/4.
 Measured S10°E., 12.5 ft., to point rock was found.
 Measured S20°W., 8.5 ft., to rotten stump hole.

Description of monument and accessories I established to perpetuate the original location of this corner:


At center of measured point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 25" in the ground and mound of stone around to cap.
 From which by magnetic declination of N20°E:
 A 16" Lodgepole Pine bears S18°E., 21.1 ft., scribed 1/4 S9 BT.
 A 15" Fir bears N35°W., 17.7 ft., scribed 1/4 S4 BT.
 Painted blazes red and 6" red band around.
 Placed 54-3s, 54-4s and brass washers marked PLS 1051 on BT.
 Old BTs have 54-3s.
 Placed 54-4 on a steel fence post 5' East of the corner.

T10S R35E
 S4
 1/4 ———
 S9
 OR PLS 1051
 1981

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Daniel Rowland
 Troy Phillips

July 8, 1981

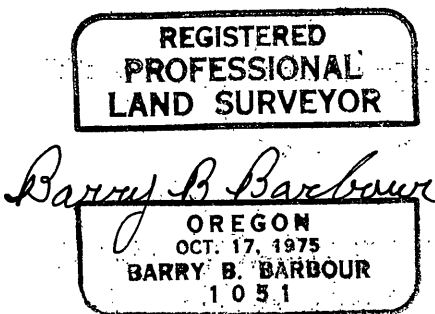

Office of.....County.....Surveyor..... County of.....Grant.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 20 day of July....., 1981
 Robert D. Bayett by
 (COUNTY OFFICIAL) (DEPUTY)