

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. Z-21

History of original corner establishment:

Corner was originally established by Herman D Gradon under G.L.O. contract No. 416 during November, 1880. Surveyors Generals notes state: "Set stone 16x12x6 in mound of stone for 1/4 sec. cor. from which a fir 6 in. diam. bears N20°E 9 lks. dist. Set stone 12x10x6 in mound of stone for Standard cor. to secs 35 and 36 from which a pine 42 in. diam. bears N40°W, 22 lks. dist., a tamarack 24 in. diam. bears N55°E, 21 lks. dist. Country rolling and heavily timbered with pine, fir and tamarack. Dense undergrowth if same and buckbrush."

DIAGRAM

```

T10S R35E
S35 | S36
  T11S
    
```

Description of corner evidence found:

Found stone near record size, but no notches. Also small mound of stone. At a point S55°E, 13.8 ft. from a tamarac snag, a 30" live pine bears N44°W, 16.8 ft. scribed SCS35 T10SR35E BT. Only BT left on snag.

Description of monument and accessories established to perpetuate the original location of this corner:

At center of above described stone, set pipe 25" in the ground and mound of stone around to cap.
 From which by magnetic declination of N20°E:
 An 8" Fir bears N44°E, 33.0 ft. scribed T10SR35E S36 BT.
 Placed 54-3, 54-4 and brass washers stamped PLS 1051 on BTs. Placed 54-4 on steel fence post 5' North of the corner.


```

T10S R35E
S35 | S36
  T11S
OR PLS 1051
1980
    
```

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Robert Boling
 Larry Shirley

July 21, 1980

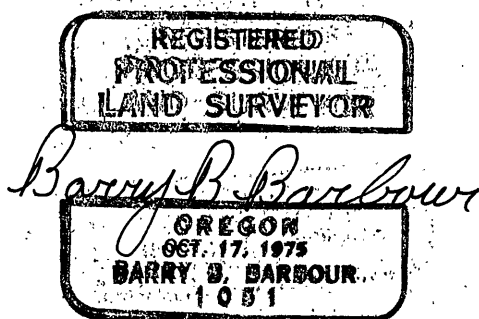

Office of.....County Surveyor.....County of.....Grant.....
 Oregon.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the 20th day of January, 1981.
 Robert D. Baggett by
 (COUNTY OFFICIAL) (DEPUTY)