

CORNER


RESTORATION

CORNER: W1/4 Sec 8 TWP. 11S. RANGE 26E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 371

CONTRACT DATE: October 27, 1880

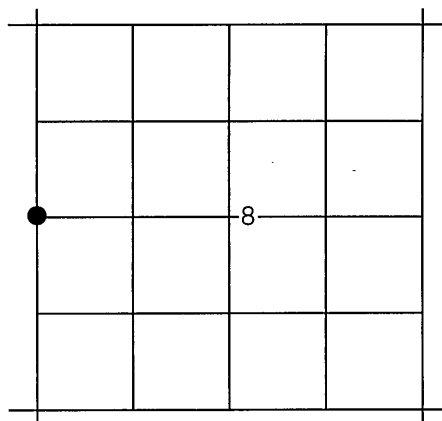

Subsequently remonumented by
Robert D. Bagett, County Surveyor, July 31, 1979.
See Map of Survey No. 571 and corner restoration records.

ORIGINAL DESCRIPTION: Set stone 16x15x10 for ¼ sec. cor. Raised stone mound at corner.

I found the original stone in 1979. My record states:
At the corner point: Set 1½"x30" iron pipe 30" in the ground with brass cap marked (marks shown below). No bearing trees available.


RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

AUG 6, 1999
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*



August 3, 1999

Grant County Surveyor


EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, surrounded by a mound of stone, 3 ft. base.
East-West fence is 2 ft. south of corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1979 is in good condition.

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°40'E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1999 OPLS 598.
A 5/8"x30" iron pin, bears S89°25'E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1999 OPLS 598.
A 5/8"x30" iron pin, bears N89°25'W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1999 OPLS 598.
A 5/8"x30" iron pin, bears N44°32'W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1999 OPLS 598.

MONUMENT MARKED

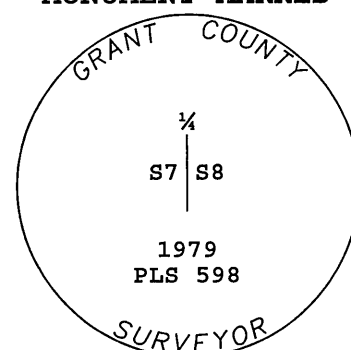

Used true bearings (solar observation) and a steel tape.