


CORNER RESTORATION

CORNER: NW Sec 20 TWP. 11S. RANGE 26E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 371

CONTRACT DATE: October 27, 1880

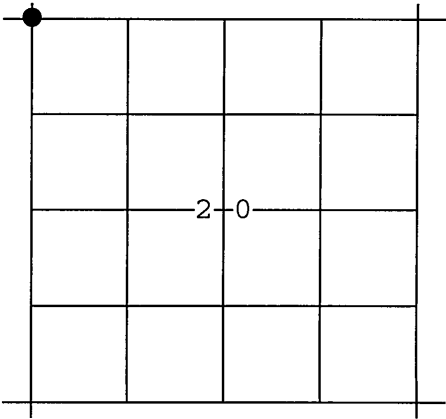

Subsequently resurveyed and remonumented by Robert D. Bagett, County Surveyor, July 31, 1979. See Map of Survey No. 571 and corner restoration records.

ORIGINAL DESCRIPTION: Set stone 12x10x8 for corner to Secs. 17, 18, 19 and 20. Raised stone mound at corner.

I did not find the original stone in 1979. My record states: No evidence, I established the NW corner Sec. 20 at proportionate distance between the W¼ Sec. 8 and the NW corner Sec. 29 and at the original distance 1.90 chs from the East river bank of the John Day River. At the corner point: Set a 1½"x30" iron pipe in the ground with a brass cap marked (marks shown below). I surrounded the pipe with a mound of stone. No bearing trees available.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

AUG 6, 1999
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

RENEWAL DATE 12/31/99

August 3, 1999 Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, flush with ground surface, surrounded by a mound of stone, 3 ft. base.

The centerline stripe of State Hwy. 19 is 40.5 ft. west of the corner. The centerline of the Hoffman driveway is 60 ft. south of the corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.
The monument set in 1979 is in good condition.

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1999 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1999 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 10.80 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1999 OPLS 598. (At north edge boulder)
A 5/8"x30" iron pin, bears N45°W, 10.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1999 OPLS 598.

MONUMENT MARKED

GRANT COUNTY

T11S R26E
S18 | S17
S19 | S20

1979
PLS 598

SURVEYOR

Used mag. compass with 18°E var. and a steel tape.