


RECORD OF LAND CORNER MONUMENTATION

CORNER: NW Cor. Sec. 27, Twp. 11 S., R. 26 E., W.M.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 371

CONTRACT DATE: September 8, 1880



ORIGINAL G.L.O. DESCRIPTION: Set Stone 20X14X6 for Cor. to Secs. 21, 22, 27 and 28 Raised Stone Mound at Cor.

EVIDENCE FOUND: At the corner point, we found a stone measuring 20"X10"X7". The stone had no discernible markings, but was found with three smaller stones in an embedded mound. I accept the found stone as the original corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:


At the corner point, I set a 5/8"X30" iron pin with attached 3" aluminum cap, 27" in the ground. Cap is marked as shown below. Built a 3 ft. mound of stone around the iron pin.

FROM WHICH, I SET THE FOLLOWING REFERENCE POINTS:

A 5/8"X30" iron pin bears N.78°00'E., 20.38 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

A 5/8"X30" iron pin bears S.62°00'W., 23.94 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

A 5/8"X30" iron pin bears N.43°08'W., 20.71 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

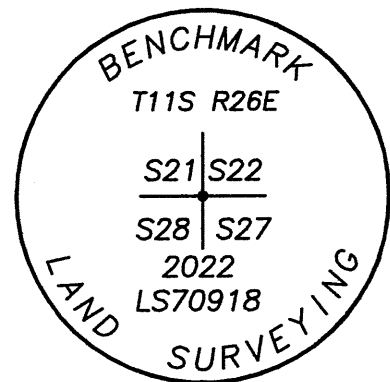

ALSO FROM WHICH, I SCRIBE THE FOLLOWING BEARING TREE:

A multi-trunk Juniper, northern trunk having a 12" diam. bears S.03°E., 32.9 ft., scribed: T11SR26E S27 BT

Distances to BT measured to an aluminum nail driven in the side-center of the tree near the root crown. Placed BT tag on BT.

Used RTK GPS to measure Reference Points. Bearings to RP's are based on Grant County Record Map of Survey No. 2190. Used a steel tape and compass with 15 degree East declination applied to measure to BT

RESTORATION BY:

Michael C. Springer, PLS
David Dobson, Survey Tech.

Benchmark Land Surveying, Inc.
217 N. Canyon Blvd.
John Day, OR, 97845
(541) 575-1251
benchmarkls.com


Surveyed: August 30, 2022

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

SEP 1 2022

BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2024