


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

***History of original corner establishment:***

Original corner established by: Aaron F. York, Deputy Surveyor, under Contract No. 371, dated Sept. 8, 1880.

Surveyor General Record States: Set stone 19x12x10 inches, for corner to Sections 23,24,25 &26. Raised stone mound at corner.

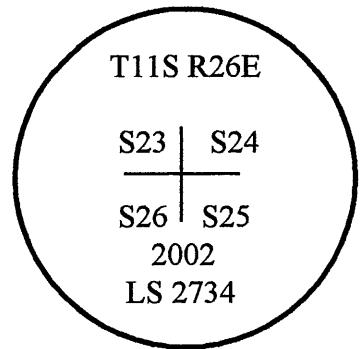

***Description of corner evidence found:***

No evidence of the original corner was found.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jack L. Watson*

OREGON  
SEPTEMBER 19, 1995  
JACK L. WATSON  
2734

RENEWAL DATE: 6/30/2004

See Record Map of Survey No. 1642

***Description of monument and accessories set at corner location:***

I set this corner at double proportion. Set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 20 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

A 6" Juniper bears N9°W, 20.2 feet, marked XBT.

A 5/8"x24" iron pin bears N52°E, 8.5 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x24" iron pin bears S9°E, 9.0 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x24" iron pin bears S52°W, 8.1 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination.

Date: August 20, 2002

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 6 day of Sept, 2002.  
Robert D. Bayett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)