

CORNER RESTORATION


CORNER: N $\frac{1}{4}$ Sec:25 TWP: 11S. RANGE:26E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 371

CONTRACT DATE: Sept. 8, 1880

Subsequent resurvey by Robert D. Bagett
dated July, 1968. (Grant County Mos #117)

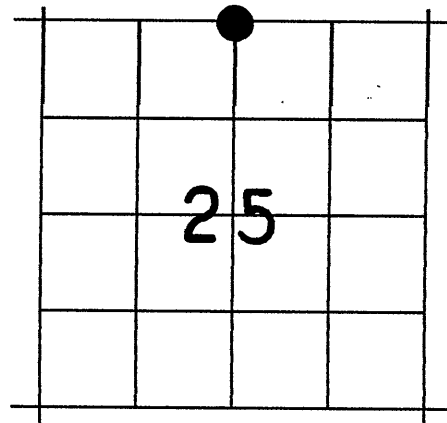

ORIGINAL DESCRIPTION: Set stone 12x10x8 for 1/4 Sec. Cor. Raised Stone mound at Cor..

Bagett's Record: The $\frac{1}{4}$ cor. bet. sec. 24 and 25 monumented with a basalt stone 12x10x8 ins mkd. $\frac{1}{4}$ on N. face, and set in a mound of stone.

At the corner point:

Set an iron pipe, 30 ins. long, 1 $\frac{1}{4}$ ins. diam., 20 ins. in the ground with sides of pipe mkd. $\frac{1}{4}$ S24 S25 LS 598.

From Which:

New Bearing Trees:

A Juniper 8"diam., bears N67°E, 198 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

A double trunked pine 20"diam., bears N22°W, 426 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

Replace original corner stone alongside pipe.

Raise a mound of stone, 3 ft. base, to top of pipe.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

RECEIVED AND
FILED

NOV 12 1992

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

OFFICE OF COUNTY SURVEYOR
Attest: *[Signature]*

Nov. 2, 1992

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{4}$ "x30" Galv. iron pipe, in a mound of stone, 15" in the ground marked $\frac{1}{4}$ S24 $\frac{1}{4}$ S25 LS 598 on side of pipe.

From Which:

A Juniper 10"diam., bears N71°E, 130.7 ft., scribing visible.

A double trunked pine 22"diam., bears N18°W, 281.4 ft., with blaze healed over.

Also found a stone 12"x10"x8" marked 1/4 on one face buried alongside pipe.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1 $\frac{1}{2}$ "x30" galv. iron pipe, 20" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 7"diam., bears S8°E, 312.5 ft. marked 1/4S25 CSBT.

A Juniper 7"diam., bears S54°W, 66.4 ft. marked 1/4S25 CSBT.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR
T11S R26E
S24
 $\frac{1}{4}$ —
S25
1992
OPLS 598

Buried marked stone East and alongside iron pipe, also buried marked 1968 iron pipe North and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.