


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

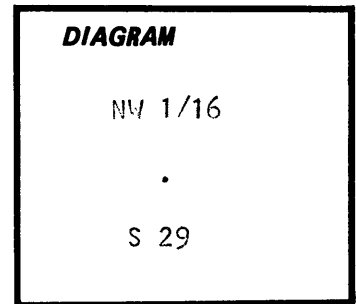

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner position, I set a 2½"x30" aluminum pipe with a National Park Service aluminum cap marked as shown, 24 inches in the ground, with a 6 inch diameter concrete collar, from which:

X B0 chiseled in rock face bears North 70° East, 23.2 feet


No other bearing objects available

Raised mound of stone around monument

Set steel fence posts approximately 5 feet North and East of corner

Corner set November 11, 1983

Witnesses: Greg Blackman and Rick Robinson

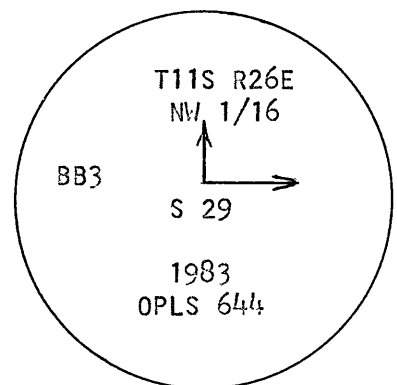

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination and the distance to the bearing object is to the chiseled cross.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 15 day of August, 1984
Robert D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)