



CERTIFIED RECORD OF LAND CORNER MONUMENTATION
NE1/16 Section 26, T11S, R26E, W.M.

History of original corner establishment:
NONE

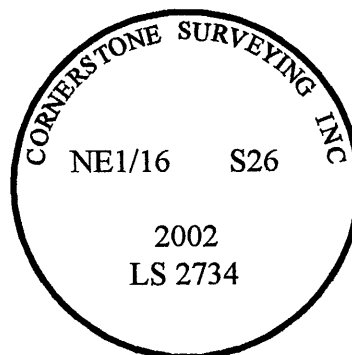

Description of corner evidence found:
NONE

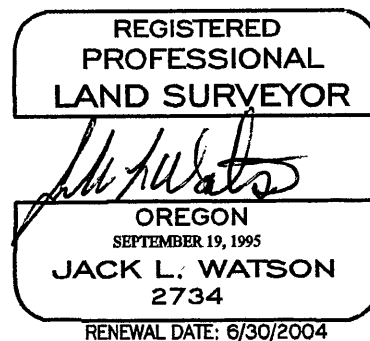

See Record Map of Survey No. 1642

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x30" iron pin with attached 2" aluminum cap, 26 inches in ground, built mound of stone and concrete around cap. The cap is stamped as shown in the diagram.

From which:

A 5/8"x30" iron pin bears N30°W, 11.30 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S45°W, 11.70 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 18° E. declination.

Date: August 28, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Sept., 2002.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)