



CERTIFIED RECORD OF LAND CORNER MONUMENTATION
CW1/16 SECTION 25, T11S, R26E, W.M.

History of original corner establishment:
NONE

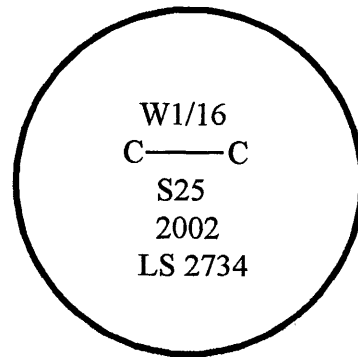

Description of corner evidence found:
NONE

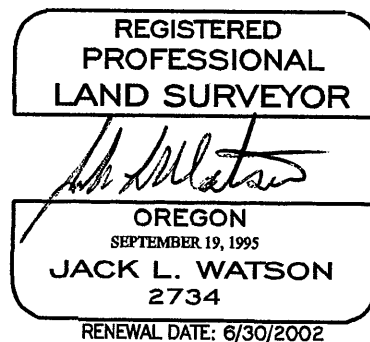

See Record Map of Survey No. 1629

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 2½" x 30" iron pipe with attached 3½" brass cap, 28 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 10" P. Pine bears S15°W, 24.4 feet, marked CW1/16S25BT.

A 12" P. Pine bears West, 23.1 feet, marked CW1/16 S25BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: March 14, 2002

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 3rd day of APRIL, 2002.
Robert D. Bager by _____
(COUNTY OFFICIAL) (DEPUTY)