

CORNER RESTORATION


CORNER: E $\frac{1}{4}$ Sec:25 TWP: 11S. RANGE: 26E.

ORIGINAL SURVEY BY: W. Byars

CONTRACT NUMBER: 185

CONTRACT DATE: May. 7, 1873

Subsequent resurvey by Robert D. Bagett
dated July, 1968. (Grant County Mos #117)

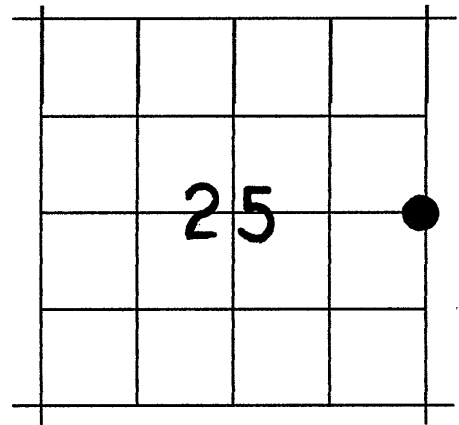

ORIGINAL DESCRIPTION: Set $\frac{1}{4}$ sec.cor. a stone 15x8x7

Bagett's record: The $\frac{1}{4}$ cor. bet. secs. 25 and 30, monumented with a basalt stone 8x14x6 ins., mkd. $\frac{1}{4}$ on W. face.

At the corner point.

Set an iron pipe 30 ins. long, $1\frac{1}{4}$ ins. diam., 24 ins. in the ground with side of pipe mkd.

T11S
 $\frac{1}{4}$
S25 | S30
R26E | R27E
LS 598

From Which: New Bearing Trees:

A Pine 9"diam., bears S44°E, 33 lks. dist., mkd., $\frac{1}{4}$ S30 BT.

A Pine 12"diam., bears S21°W, $23\frac{1}{2}$ lks. dist., mkd., $\frac{1}{4}$ S25 BT.

Replace original cor. stone alongside iron pipe.

Raise a mound of stone, 3 ft. base to top of post.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

RECEIVED AND
FILED

NOV 12 1992

Robert D. Bagett

OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
Attest: *G.J. Russell*

Nov. 2, 1992

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Grant County Surveyor

EVIDENCE FOUND: Found a $1\frac{1}{4}$ "x30" galv. iron pipe 28" in the ground marked T11 R27 R26 $\frac{1}{4}$ S31 S25 LS 598 on side of pipe.

From Which:

A Pine 11"diam., bears S53°E, 21.8 ft., with healed over blaze.

A Pine 15"diam., bears S31°W, 15.4 ft., with scribing partially visible.

Also found a stone 14"x8"x6" marked $\frac{1}{4}$ on one face buried alongside iron pipe.

Corner falls at intersection of fences running North, South, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a $1\frac{1}{2}$ "x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Pine 7"diam., bears N38°E, 12.4 ft.
marked X CSBT.

A Fir 7"diam., bears N75°W, 46.1 ft.
marked X CSBT.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR

T11S
 $\frac{1}{4}$
R26E | R27E
S25 | S30
1992
OPLS 598

Buried marked stone North and alongside iron pipe, also buried marked 1968 iron pipe West and alongside iron pipe, raised a mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.

T-25