


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Aaron F. York, Deputy Surveyor, under Contract No. 371, dated Sept. 8, 1880.

Surveyor General Record States: Set stone 14x12x8 inches, for 1/4 section corner. Raised stone mound at corner.

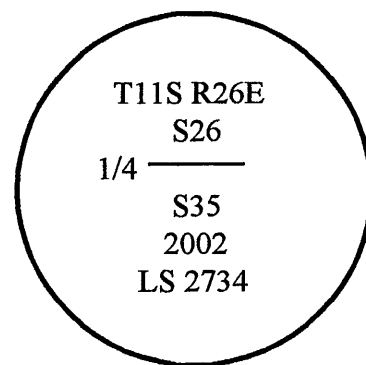

Description of corner evidence found:

Found stone 14x12x7 inches, set upright 8" in the ground in a ring of stones, marked 1/4 on the north face. Corner is in an east-west fence line.

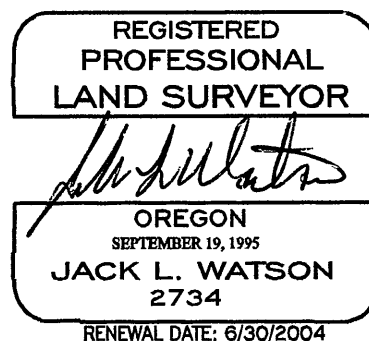

See Record Map of Survey No. 1642

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 24 inches in the ground, surrounded by a mound of stone. Placed original marked stone east alongside pipe. The cap is stamped as shown in the diagram.

From which:

A 8" Juniper bears N10°E, 19.7 feet, marked 1/4S26BT.

A 12" Juniper bears N46°W, 67.6 feet, marked 1/4S26BT.

A 5/8"x30" iron pin bears S48°E, 18.76 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S30°W, 18.78 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: August 27, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Sept., 2002.
Robert D. Bazzani by _____
(COUNTY OFFICIAL) (DEPUTY)