


CORNER RESTORATION

CORNER SW TWP 11S RANGE 29E

ORIGINAL SURVEY BY: William H. Byars

CONTRACT NUMBER:

CONTRACT DATE: 1873

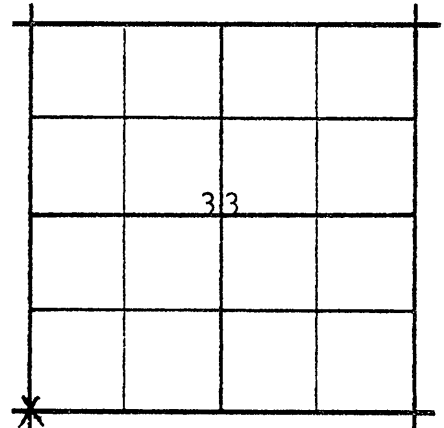

ORIGINAL DESCRIPTION:

Set stone 30"x 14"x 6"

Fd. in retracement by William R. Gradon in 1884, who took BTs as follows;
 A pine 24" diam. bears N60E; 24 lks; mkd T11S R29E S33 BT
 A pine 20" diam. bears S40E; 94 lks; mkd T12S R29E S 4 BT
 A pine 30" diam. bears S25W; 52 lks; mkd T12S R29E S 5 BT

RESTORATION BY, STAMP AND DATE:

BAGETT & GRIFFITH SURVEYING
 170 S. DAYTON - PH. 575-1251
 JOHN DAY, OREGON 97845

July 1969



EVIDENCE FOUND:

Fd. stone and
 A pine 31" diam. bears S28½W; 34.7 ft. mkd T12S R29E S5 CC BT
 A pine 35" diam. bears S34E; 61.7 ft. mkd T12S R29E S4 CC BT

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:


Show how trees are scribed and basis of bearings, including compass var.

Set 2½" x 30" iron post with brass cap.
 From which:

- A pine 7" diam. bears S8W; 66.2 ft.
mkd T12S R29E S5 BT
- A fir 13" diam. bears N68W; 27.4 ft.
mkd T11S R29E S32 BT
- A fir 15" diam. bears S58½E; 27.2 ft.
mkd T12S R29E S4 BT
- A pine 16" diam. bears N74E; 73.4 ft.
mkd T11S R29E S33 BT

MONUMENT MARKED

GRANT COUNTY SURVEYOR

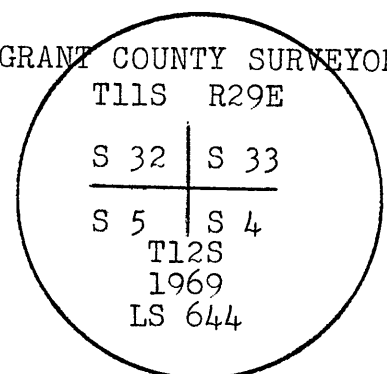

Complete and File with Office of the Grant
 County Surveyor, Grant County, Oregon, Steel tape & compass
 Courthouse, Canyon City, Oregon 97820 Var. = 20° East