

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

CORNER WAS ORIGINALLY ESTABLISHED BY W. H. BYARS, IN AUGUST 1873, UNDER GENERAL LAND OFFICE CONTRACT NO. 197. U.S. SURVEYOR GENERAL NOTES STATE: SET A BASALT STONE 14X10X8 FOR THE ¼ SECTION CORNER.

REESTABLISHED BY DOUGLAS FERGUSON, PLS NO 848, SEE CORNER CERTIFICATE FILED ON DECEMBER 18, 1986 IN THE GRANT COUNTY SURVEYOR'S.

NO EVIDENCE IS FOUND ALL TRACES HAVE BEEN LOST TO LOGGING AND ROADING.

NO ACCESSORIES ARE ORIGINALLY ESTABLISHED. THE AREA IS COMPLETELY COVERED BY LOGGING AND ROADING ACTIVITY. SET CORNER POSITION AT PROPORTIONATE MEASURE BETWEEN THE CORNER AS PREVIOUSLY ESTABLISHED BY PROPORTIONATE MEASURE, ½ MI. NORTH AND THE CORNER FOUND ½ MI. SOUTH. SEE THE REFERENCE MAP OF SURVEY NO. 955, MAP OF SURVEY NO. 904) THE PROPORTION POSITION OF THIS CORNER CONFORMS REASONABLY WELL WITH THE CALL FOR THE CREEK 165 FT. N.

SET A 2½"x30" ALUMINUM PIPE WITH 3½" ALUMINUM CAP, STAMPED AS SHOWN ON THE DIAGRAM, SET 6' IN THE GROUND, AND RAISED A MOUND OF STONE & EARTH AROUND THE PIPE. FROM WHICH:

A PINE 16" DIA., BEARS N 50°51' W., 123.9 FT., SCRIBED: 1/4 S29 BT
A FIR 12" DIA., BEARS N 72°05' E., 89.5 FT., SCRIBED: 1/4 S28 BT
MEASUREMENTS TO TREES TAKEN WITH AN ELECTRONIC TACHEOMETER WITH ANGLES TURNED FROM SURVEY CONTROL NETWORK.
NAILED A BRASS WASHER STAMPED PLS 848 ON BLAZE ABOVE BT SCRIBE, BEARING TREE SIGN ABOVE BLAZE, AND WARNING SIGN ON BACK OF EACH TREE. PAINTED A 6' RED BAND AT BREAST HT. AROUND EACH TREE. SET STEEL FENCE POST WITH WARNING SIGN, NORTH ALONGSIDE PIPE, IN THE STONE MOUND.

DESCRIPTION OF CORNER EVIDENCE FOUND:

FOUND A 3¼" ALUMINUM CAP, STAMPED AS SHOWN ON DIAGRAM, PROJECTING 16" ABOVE GROUND IN MOUND OF STONE (RED LAVA ROCK) WITH 3.5 FT. BASE, 8" TALL. MONUMENT IS APPROXIMATELY 10 FT. SOUTH OF A PRIVATE ROAD AND APPROXIMATELY 165 FT. SOUTH OF A DRY CREEK BED.


ACCESSORIES:
23" DIA. PONDEROSA PINE, BEARS N 50°51' W, 123.9FT., WITH HEALED BLAZE IN GOOD CONDITION.
FIR STUMP, BEARS N 72° E, 89.5FT., WITH VISIBLE SCRIBING.

DESCRIPTION OF MONUMENT AND ACCESSORIES | ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

NEW REFERENCE MONUMENTS:
A 5⁄8"x24" IRON ROD WITH 2" ALUMINUM CAP, BEARS N45°E, 34.75 FT., STAMPED "RM 1", "PLS 91693", PROJECTING 1" ABOVE GROUND IN NORTH BANK OF PRIVATE ROAD.
A 5⁄8"x24" IRON ROD WITH 2" ALUMINUM CAP, BEARS S55°E, 12.35 FT., STAMPED "RM 2", "PLS 91693", PROJECTING 1" ABOVE GROUND IN SOUTH BANK OF PRIVATE ROAD.
A 5⁄8"x24" IRON ROD WITH 2" ALUMINUM CAP, BEARS S50°W, 15.54 FT., STAMPED "RM 3", "PLS 91693", PROJECTING 1" ABOVE GROUND IN SOUTH BANK OF PRIVATE ROAD.

BEARINGS WERE TAKEN FROM A MAGNETIC COMPASS WITH 14° E. DECLINATION.
DISTANCES WERE MEASURED WITH A STEEL TAPE.

T-09

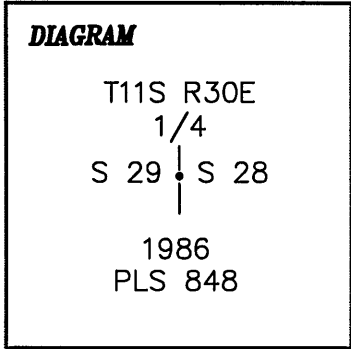

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

OCT 26 2022

BY:

[Signature]

DATE: AUGUST 25, 2022
WITNESSES: T. DEJESUS QUINONES
REID KELLY

REGISTERED
PROFESSIONAL
LAND SURVEYOR
[Signature]
OREGON
SEPTEMBER 11, 2018
ROBERT C. MOYERS
91693

RENEWS: 12/31/2022