


CORNER RESTORATION

East $\frac{1}{4}$ cor.
CORNER Sec. 33 TWP 11 S. RANGE 30 E., W.M.

ORIGINAL SURVEY BY: Samuel W. Lackland

CONTRACT NUMBER: 415

CONTRACT DATE: August 19, 1881

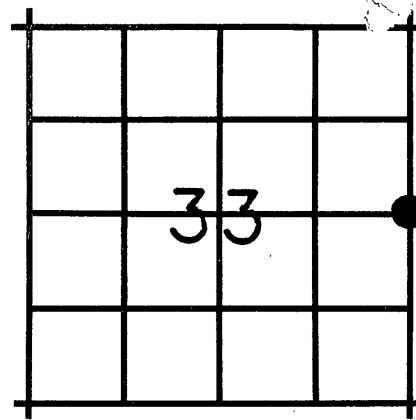

ORIGINAL DESCRIPTION:

40.00 set basalt stone 14x10x6 in. 10 inches in ground for $\frac{1}{4}$ section corner marked $\frac{1}{4}$ on W. face from which:

A pine 36" in diam. bears N. 37° W. 184 lks. dist. marked $\frac{1}{4}$ S BT

A juniper 20" in diam. bears S. 47° E. 220 lks. dist. marked $\frac{1}{4}$ S BT.

RESTORATION BY, STAMP AND DATE:

R. D. Baggett
G. L. Earl

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

RECEIVED AND
FILED

FEB 29 1980

OFFICE OF COUNTY SURVEYOR

Robert D. Baggett
Attest: *Samuel W. Lackland*

January 22, 1980

Grant County Surveyor

EVIDENCE FOUND:

Found a basalt stone 13x9x5 inches marked $\frac{1}{4}$ and set in a mound of stone.

Found a pine 41 inches in diam. bears N. 29° W., 123.3 feet, marked $\frac{1}{4}$ S BT (Measured to face of blaze.)

Found a juniper snag 28 inches in diam. bears S. 52° E., 146.0 feet, marked $\frac{1}{4}$ S BT (Measured to face of blaze.)

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point:

Set a 1 $\frac{1}{2}$ "x30" iron pipe 27" in the ground with brass cap marked as shown:

from which I scribe NEW BEARING TREES:

A juniper, 15" in diam. bears S. 36° W., 65.3 feet, marked T11SR30E $\frac{1}{4}$ S33CSBT.

A juniper 6" in diam. bears S. 54° E., 137.0 feet, marked T11SR30E $\frac{1}{4}$ S34CSBT.

I buried the corner stone inverted and East of the iron pipe, and surrounded the pipe with a mound of stone.

I used a magnetic compass with a 20° East variation and a steel tape measuring to the face of the blaze on the BT's.

MONUMENT MARKED

